



PRODUCT CATALOG



ISO 9001 Registered

Delano, MN USA



**Orion Registrar, Inc., USA
Certificate of Registration**

This is to certify the Quality Management System of:

**Arctic Fox, LLC
570 South 7th Street
Delano, Minnesota 55328
USA**

*Has been assessed by Orion Registrar and found to be in compliance with
the following Quality Standard:*

ISO 9001:2008

The Quality Management System is Applicable to:

**Design and Manufacture of Fluid Heating
System Components and Provider of Custom
Tube and Metal Goods Fabrication Services.**

The Registration period is from December 5, 2009 to December 15, 2011.

*This registration is subject to the company maintaining its system to the
required standard, and applicable exceptions, which will be monitored by Orion.*

Client ID 00360-00001. Certificate ID A0000071-10.

EAC / NAICS / SIC Code(s): 17 18 / 332999 / 3399 3585



Paul M. [Signature]
President

01/05/2010
Date



Orion Registrar, Inc. ★ Arvada, Colorado ★ PO Box 745070 ★ 303-455-6010 ★ FAX 303-456-6631

To authenticate this certificate please visit www.orion4value.com

TABLE of CONTENTS

ALTERNATIVE FUEL WARMING PRODUCTS, NATURAL GAS AND PROPANE

Natural Gas and Propane	16
Biodiesel	17

BATTERY HEATERS

North America	20
International	43
Thermostat	20 & 43

CIRCULATION PUMPS, COOLANT

DC Voltage, 12 and 24	24
AC Voltage, 115	24
Power Relay	24

COOLANT DAM® PRESSURE TESTER

Adapters, Vehicle Specific	29
Kit, T-1000, description and use	28
Instructions, general operation	28
Service Parts	30

FITTINGS

Fittings and Valves	32—35
---------------------------	-------

FLANGES, TANK, WELD-ON

Round and Square	23
------------------------	----

FUEL AND FLUID WARMERS

ELECTRIC

Hot Line® 12 or 24 Volt Fuel Line	18
Self Adhesive, 12—24— 120—240 Volt	19

FUEL

IN-LINE	12—17
Thermal Liner 15	15
Biodiesel	17
IN-TANK	

ARCTIC FOX MODELS

Without Thermostat	9—10
With Coolant By-Pass Thermostat	11
Service Parts	10

HOT FOX™ MODELS

Adapters, Fuel Tank	7
Performance Data	4
Without Coolant Shut-Off Thermostat	4
With Coolant Shut-Off Thermostat	6
With Auxiliary Fuel Standpipe	5
Service Parts	6

HYDRAULIC

Custom Tube Fabrication	23
Hot Fox™ Model and Adapters	22
Hydra Liner Models	21
Mini Style for Small Reservoirs	23

FUEL STANDPIPES

Auxiliary Power Unit, Fuel Fired Heater, Main Engine Supply	27
Dual Draw / Dual Return	27

HOSE

Clamps	31
Coolant	31
Fuel, SAE 100R5	31
Insulation	31

INTERNATIONAL CATALOG

38—44

INSULATION, FUEL AND COOLANT HOSE

31

LITERATURE AND SALES SUPPORT

36

MANIFOLDS, COOLANT DISTRIBUTION

25—26

RETURN POLICY

North America	37
International	44

THERMOSTATS, COOLANT SHUT-OFF

8

VALVES


34

WARRANTY


North America	37
International	44

HOT FOX™ IN-LINE/IN-TANK FUEL WARMERS

- **Lowest Profile 1-1/3" (34mm)**
- **Stainless Steel**
- **All Welded Construction**
- **Sizes for All Tanks**
- **Rotates for Easy Mounting**
- **Mounts in Vehicle Sending Gauge Opening**

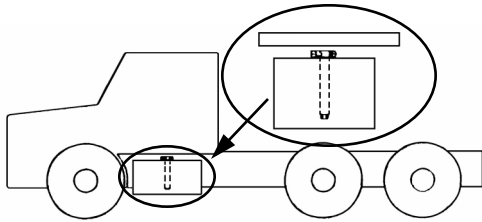


Low Profile Design
HOT FOX™ fits where other fuel warmers can't.

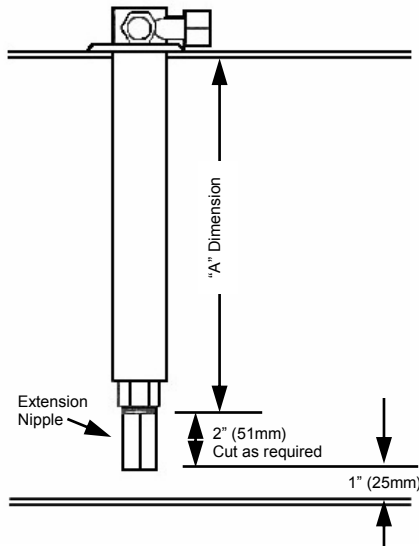

Get faster warming and cleaner installation with the HOT FOX™ fuel warmer from Arctic Fox. It truly is an in-line fuel warmer that installs in the fuel tank. The simple 1-1/2 inch (38mm) diameter stainless steel tube inserts into the tank through a standard USA fuel gauge sending unit opening. Coolant passages inside the tube surround the fuel standpipe to provide excellent heat rise. The internal fuel line features an exclusive spiral design to maximize heat exchange between warm coolant and cold fuel.

For most efficient heat transfer, choose the longest HOT FOX™ fuel warmer available for your tank diameter/depth. Each unit comes with a 2" (51mm) extension fitting: A-858. Special sizes are available upon request.

Covered by U.S. Patent No.'s
4,748,960—5,029,634
and 5,135,044

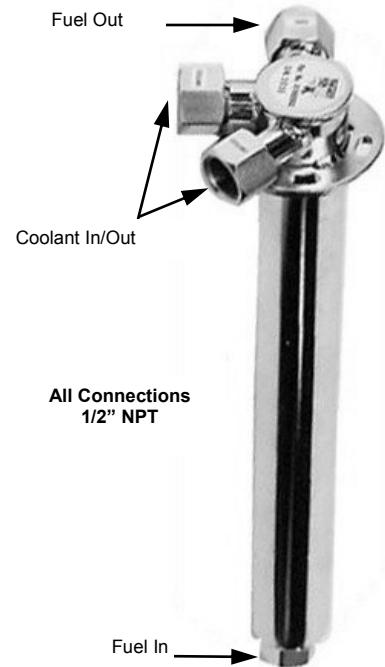

SELECTION CHART		"A" Dimension		
Tank Depth/Diameter	Part Number	No Spacer	1/2" (13mm) Spacer KT-875	1" (25mm) Spacer KT-877
08-10" / 203-245mm	HFG 08-10	7" / 178mm	6-1/2" / 165mm	6" / 152mm
10-12" / 245-305mm	HFG 10-12	9" / 229mm	8-1/2" / 216mm	8" / 254mm
12-14" / 305-356mm	HFG 12-14	11" / 279mm	10-1/2" / 267mm	10" / 203mm
13-15" / 330-381mm	HFG 13-15	12" / 305mm	11-1/2" / 292mm	11" / 279mm
14-16" / 356-406mm	HFG 14-16	13" / 330mm	12-1/2" / 318mm	12" / 305mm
17-19" / 432-483mm	HFG 17-19	16" / 406mm	15-1/2" / 394mm	15" / 381mm
20-22" / 508-559mm	HFG 20-22	19" / 483mm	18-1/2" / 470mm	18" / 457mm
22-24" / 559-610mm	HFG 22-24	21" / 533mm	20-1/2" / 521mm	20" / 508mm
24-26" / 610-660mm	HFG 24-26	23" / 584mm	22-1/2" / 572mm	22" / 559mm
26-28" / 660-711mm	HFG 26-28	25" / 635mm	24-1/2" / 622mm	24" / 610mm
27-29" / 686-737mm	HFG 27-29	26" / 660mm	25-1/2" / 648mm	25" / 635mm

Heat Rise Data Coolant Temperature between 192°F / 89°C and 201°F / 94°C—Coolant flow at 5GPM/19LM

HFG 13-15			HFG 20-22			HFG 27-29		
Fuel Flow GPM/LM	Temp In F/C	Temp Out F/C	Fuel Flow GPM/LM	Temp In F/C	Temp Out F/C	Fuel Flow GPM/LM	Temp In F/C	Temp Out F/C
0.17/0.6	+1.7/-17	69.5/21	0.19/0.7	-3.7/-20	84.3/29	0.21/0.8	0.0/-18	81.7/28
0.50/1.9	+2.6/-16	43.2/6	0.51/1.9	-3.7/-20	51.6/11	0.48/2.2	+1.8/-18	71.6/22
1.53/5.8	-0.7/-18	23.9/-5	1.44/5.5	-3.8/-20	34.2/1	1.57/6	2.2/-17	45.7/8
0.16/6	-20.9/-29	60.9/16	0.20/0.8	-19.2/-28	67.8/20	0.24/1.1	-22.0/-30	66.2/19
0.50/1.9	-20.4/-29	19.2/-7	0.56/2.5	-19.9/-29	34.2/1	0.49/1.9	-21.1/-30	55.5/13
1.50/5.7	-20.3/-29	5.4/-15	1.59/6	-20.5/-29	16.8/-8	1.51/6.9	-20.1/-29	26.1/-3
0.22/0.8	-34.7/-37	37.8/3	0.16/0.6	-36.1/-38	78.9/26	0.17/0.6	-31.8/-35	67.2/20
0.52/1.9	-34.8/-37	9.5/-13	0.50/1.9	-36.0/-38	18.6/-7	0.54/2	-32.9/-36	37.2/3
1.44/5.5	-34.8/-37	-7.5/-22	1.48/5.6	-35.9/-38	-1.4/-19	1.60/6	-33.4/-36	10.8/-12

Recommendation: The HFG, TWHF, & SHFT Series HOT FOX™ fuel warmers can mount into an unused, standard USA fuel sending gauge opening. **For installations into non-reinforced gauge hole openings in tanks manufactured of 14 gauge (0.075"/1.9mm) and lighter steel or 0.100"/2.5mm and lighter aluminum, the appropriate adapter kit KT-826F, KT-827C, or KT-831 CS is suggested.** For extreme vibration applications and all applications involving horizontal mounting, the use of either A-1721, or A-2060 adapters is suggested, see e 5 for details.

HOT FOX™ FUEL WARMER WITH AUXILIARY STANDPIPE


The Hot Fox™ fuel warmer with Auxiliary Standpipe from Arctic Fox combines heated fuel standpipes for main fuel and accessory fuel supply with an in-tank fuel warmer. The streamlined all stainless steel unit installs in the fuel tank through an unused, standard USA fuel gauge sending unit opening. Operators can now easily supply diesel fired coolant heaters, diesel fired cab heaters, and other auxiliary fuel requirements as well as the main engine fuel supply all in one package.

FEATURES AND BENEFITS:


- Supplies warm fuel for both main engine and fuel fired coolant pre-heaters, cab warmers, or other fuel dependent products.
- Available with 2mm or 4mm I.D. Auxiliary Fuel Tube to accommodate low or high fuel flow accessories.
- Stainless Steel Construction for durability and compatibility with all fuels and additives.
- Low Profile—2" (51mm) mounts on vehicles with reduced clearance between fuel tank and cab.

PART NUMBER	TANK DEPTH	COOLANT PORT SIZE	MAIN FUEL PORT SIZE	AUX FUEL PORT SIZE	AUX FUEL TUBE I.D.
TWHF 10-12 2mm	10-12" / 254-305MM	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 12-14 2mm	12-14" / 305-356mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 13-15 2mm	13-15" / 254-381mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 14-16 2mm	14-16" / 356-406mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 17-19 2mm	17-19" / 432-483mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 20-22 2mm	20-22" / 508-559mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 22-24 2mm	22-24" / 559-610mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 24-26 2mm	24-26" / 610-660mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 26-28 2mm	26-28" / 660-711mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 27-29 2mm	27-29" / 686-737mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 10-12 4mm	10-12" / 254-305MM	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 12-14 4mm	12-14" / 305-356mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 13-15 4mm	13-15" / 254-381mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 14-16 4mm	14-16" / 356-406mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 17-19 4mm	17-19" / 432-483mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 20-22 4mm	20-22" / 508-559mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 22-24 4mm	22-24" / 559-610mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 24-26 4mm	24-26" / 610-660mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 26-28 4mm	26-28" / 660-711mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 27-29 4mm	27-29" / 686-737mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm

Manufactured under US Patent #'s 4,748,960 — 5,029,634 and 5,135,044. Other USA and International Patents Pending

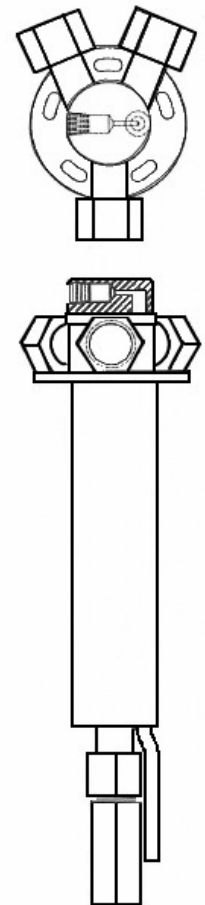

Recommendation: The HFG, TWHF, & SHFT Series HOT FOX™ fuel warmers can mount into an unused, standard USA fuel sending gauge opening. **For installations into non-reinforced gauge hole openings in tanks manufactured of 14 gauge (0.075"/1.9mm) and lighter steel or 0.100" /2.5mm and lighter aluminum, the appropriate adapter kit KT-826F, KT-827C, or KT-831 CS is suggested.** For extreme vibration applications and all applications involving horizontal mounting, the use of either A-1721, or A-2060 adapters is suggested see page 5 for details.

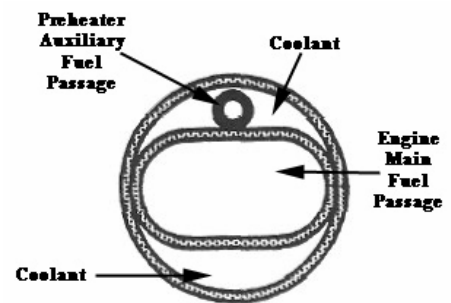


HOT FOX™ FUEL WARMER WITH SHUT-OFF THERMOSTAT

Get the fuel warming efficiency you desire and the thermostatic control you need in one factory assembled product. The Hot Fox™ Fuel Warmer with coolant Shut-Off Thermostat is the in-line fuel warmer that installs in the fuel tank through a standard USA fuel sending gauge opening and comes from the factory with a thermostat directly mounted to the heater.

Recommendation: The HFG, TWHF, & SHFT Series HOT FOX™ fuel warmers can mount into an unused, standard USA fuel sending gauge opening. **For installations into non-reinforced gauge hole openings in tanks manufactured of 14 gauge (0.075"/1.9mm) and lighter steel or 0.100" /2.5mm and lighter aluminum, the appropriate adapter kit KT-826F, KT-827C, or KT-831 CS is suggested.**

For extreme vibration applications and all applications involving horizontal mounting, the use of either A-1721, or A-2060 adapters is suggested see page 5 for details.

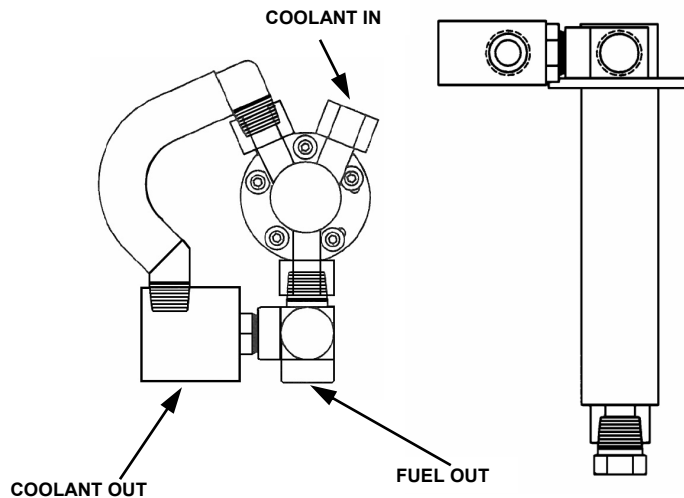


PART	TANK
SHFT-2512-10-12	10-12" / 254-305mm
SHFT-2512-12-14	12-14" / 305-356mm
SHFT-2512-13-15	13-15" / 330-381mm
SHFT-2512-14-16	14-16" / 356-406mm
SHFT-2512-17-19	17-19" / 432-483mm
SHFT-2512-20-22	20-22" / 508-559mm
SHFT-2512-22-24	22-24" / 559-610mm
SHFT-2512-24-26	24-26" / 610-660mm
SHFT-2512-26-28	26-28" / 610-711mm
SHFT-2512-27-29	27-29" / 686-737mm

CAUTION: THE HOT FOX™ WITH SHUT-OFF THERMOSTAT REQUIRES IT'S OWN COOLANT LOOP—DO NOT PLUMB IN SERIES WITH ANY OTHER COOLANT DEPENDENT DEVICES.

NOTE: When installing a HOT FOX™ with SHUT-OFF THERMOSTAT an appropriate adapter kit MUST be used. See Page 5

HOT FOX™ FUEL WARMER REPLACEMENT PARTS

ITEM	QTY	DESCRIPTION	PART #
1	5	#10-32 UNF x 1.0 Cap Screw	A-857
2	5	Stainless Steel Washer	A-861
3	2	Self Drill / Tap Screw	A-608
4	1	HOT FOX™ Fuel Warmer Gasket	A-841
5	1	Back Up Plate / Template	A-834
6	1	1/2" NPT X 2.0" (51mm) Extension Nipple	A-858
7		HOT FOX™ Fuel Warmer Extension Nipple—1/2" NPT X 21" (533mm) Long	SP-1950
8		HOT FOX™ Fuel Warmer Hardware Kit (Includes items 1-6)	KT-834

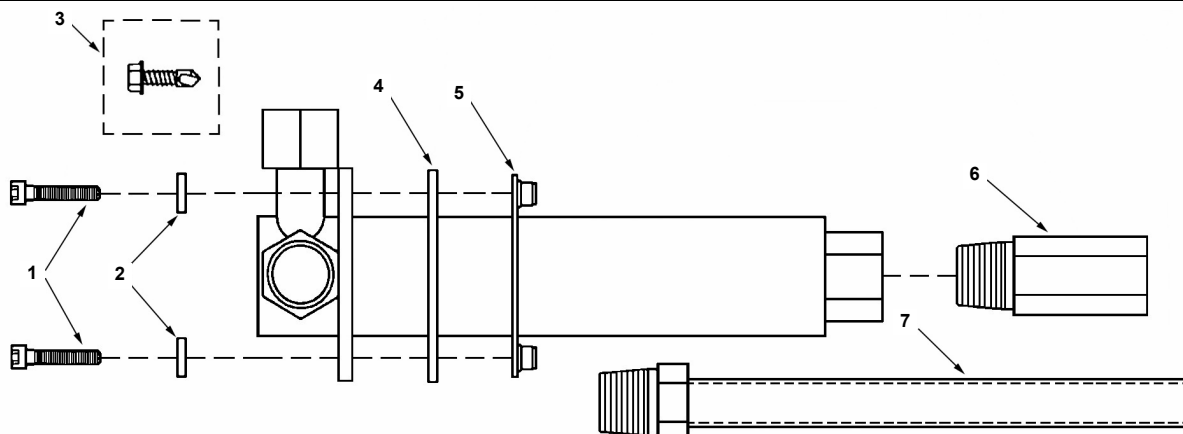

HOT FOX™ FUEL WARMER ADAPTER KITS

Adapter Kits Available for OEM & Aftermarket Applications Used to Simplify Some Installations Recommended Use Of Adapter Kits






- When installing Hot Fox™ model heaters into a non-reinforced sending gauge opening.
- When installing Hot Fox™ model heaters in tanks less than 14 gauge, 0.075"/1.9mm steel or 0.100"/2.5mm aluminum.
- When installing Hot Fox™ model heaters into tank flanges.


Recommended Use Of A-1721 or A-2060 Adapters

- When installing Hot Fox™ model heaters on applications with extreme vibration.
- When installing Hot Fox™ model heaters horizontally.

Consider Using A Spacer Kit


- When sizing a Hot Fox™ model heater to a length that will reach to an inch off the tank bottom.
- When raising the Hot Fox™ model heater will allow easier connections or to route hoses around obstacles.

ROUND TANKS	FLAT TANKS			120mm Flange
KT-827C for 22"-29"/559-737mm Dia. KT-831CS for 14"-21"/356-533mm	KT-826F	KT-828DF	KT-832L 10"/165mm Dia. KT-4231 4.7" 120mm Dia.	KT-829K
				
Applications: Adapts standard Arctic Fox fuel warmer mount to Hot Fox™ mount. KIT COMPONENTS Adapter Plate 6"/152mm Square (1) A-827 for KT-827C A-831 for KT-831CS Backing Plates (2) A-1795 Clips (4) A-649 Gasket (1)—A-611 Mounting Bolts (12) - A-610 Template (1)—A-708	Applications: Adapts standard Arctic Fox fuel warmer mount to Hot Fox™ mount. KIT COMPONENTS Adapter Plate 6"/152mm Square (1) A-826 Backing Plates (2) A-2025 Clips (4) A-649 Gasket (1)—A-611 Mounting Bolts (12) - A-610 Template (1)—A-708	Applications: Adapts 10-hole Tokheim and Polar Baron mounts to Hot Fox™ mount. KIT COMPONENTS Adapter Plate (1) A-826 Gasket (1) A-645 Mounting Bolts (10) - A-610	Applications: Adapts misc. automotive/industrial OEM 5-3/4" B.C. flanges & Arctic Fox fuel warmer weld on flanges A-820 & A-823 to Hot Fox™ mount. KIT COMPONENTS Adapter Plate KT-832L—(1) A-832 KT-4231—(1) A-2176 Gasket KT-832L—(1) A-821 KT-4231—(1) A-811 Mounting Bolts K-832L—(10) - A-610 K-4231—(10) A-856	Applications: Adapts Kenworth OEM 104.5mm B.C. Flange to Hot Fox™ mount. KIT COMPONENTS Adapter Plate (1) - A-829 Gasket (1) - A-811 Mounting Bolts (10) - A-856



Threaded Adapter
Fits 1-1/2" & 2" NPT Couplings

- | | |
|--|--|
| A-1721
(To -40° F/C)
Parts Included
(1) A-1792 Gasket
(2) A-1726 O-Ring | A-1721F
(To -90° F/-67° C)
Parts Included
(1) A-1792 Gasket
(2) A-2758 O-Ring |
|--|--|



Weld-In Adapter
For Fuel or Hydraulic Tanks

- | | |
|---|--|
| A-2060 (Steel)
A-2060-A (Alum.)
(To -40° F/C)
Parts Included
(1) A-1792 Gasket
(2) A-1726 O-Ring | A-2060F
A-2060-AF
(To -90° F/-67° C)
Parts Included
(1) A-1792 Gasket
(2) A-2758 O-Ring |
|---|--|



A-870
Blank Plate

Application:
Use to cover tank opening if Hot Fox™ has been removed.



A-4607
Tapped Plate

Application:
Use to install an auxiliary standpipe in a standard USA sending gauge opening.

Center is tapped for 1/2" NPT

SPACER KITS



KT-875

Purpose: To raise HOT FOX™ fuel warmer flange 1/2" (13mm) above tank.
Parts Included:

- (5) A-863 #10-32 UNF socket head bolts
- (1) A-841 Gasket
- (1) A-875 1/2" (13mm) Spacer

KT-877

Purpose: To raise HOT FOX™ fuel warmer flange 1" (25mm) above tank. For Kenworth recessed gauge opening & misc. others
Parts Included:

- (5) A-869 #10-32 UNF socket head bolts
- (1) A-841 Gasket
- (1) A-877 1" (25mm) Spacer

SHUT-OFF THERMOSTATS



S-400T / S-440T
With A-289
Steel Tee



S-400ST / S-440ST
With A-284
Steel Street Tee



S-400HT / S-440HT
With A-289 Steel Tee
(2) 1/4x20 Mounting Holes



S-400BT / S-440BT
With A-289 Steel Tee
Mounting Bracket, (2) Bolts & Washers


Used to control fuel temperature for any coolant type fuel warmer

- Model 400 stops coolant flow when fuel temperature through the Tee is approximately 78° to 95° F / 25° to 35° C
- Model 440 stops coolant flow when fuel temperature through the Tee is approximately 104° to 125° F / 40° to 52° C
- All fluid connections are 1/2" NPT


NOTE: Both models are coolant SHUT-OFF thermostats, any component or device connected in series with this product will NOT receive coolant once it is closed at the fuel temperatures shown.

DIMENSIONS


S-400BT

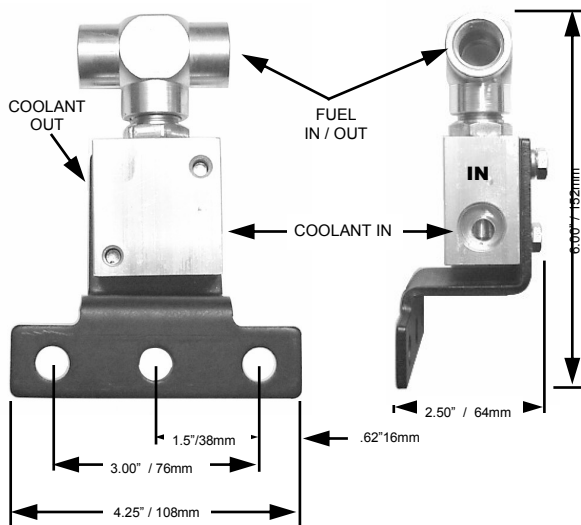

S-400BT

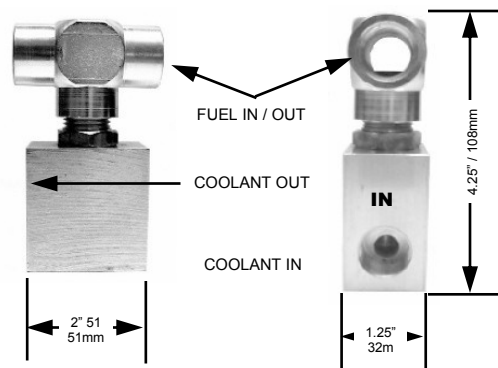

S-400BT REPLACEMENT PARTS			
ITEM	QTY.	DESCRIPTION	PART #
1	1	Shut-Off Thermostat Assembly	S-400HT
2	1	1/2" NPT Pipe Tee	A-289
3	1	Mounting Bracket	A-315
4	2	5/16" Split Lock Washer	A-317
5	2	5/16" UNC x 1.25" (32mm) Bolt	A-316

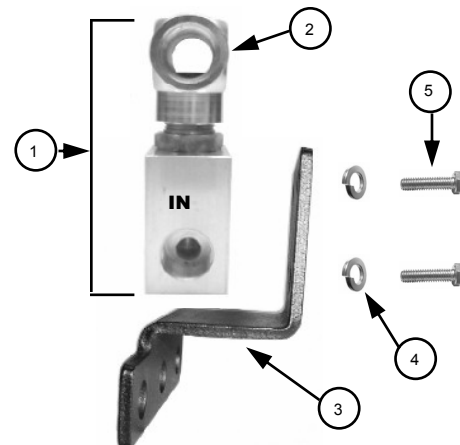

ARCTIC FOX® IN-TANK FUEL & FLUID WARMERS

The original Arctic Fox® fuel warmer. This all stainless steel loop fits flat or curved tanks. Optional fuel standpipes are available. Heaters may be ordered factory assembled to fit any tank depth from 14" through 29" (356mm through 737mm). Custom built fluid warmers may be quoted for tanks under 14" (356mm) depth or over 29" (737mm) depth. A 5 year or 600,000 mile (1,000,000 kilometer) warranty is your assurance of trouble free operation

ORDERING OPTIONS

KIT WARMERS

Part Number Example—F-253P


F= Flat Tank up to 29" (737mm) Depth
C=Curved Tank From 22" to 29" (559mm to 737mm) Depth
CS=Curved Tank Through 21" (533mm) Depth
253= The 5 includes a fuel stand pipe use 0 for no stand pipe
P=Optional 1/2" (13mm) Female fitting

ASSEMBLED WARMERS


Part Number Example—F-253P-XX

F= Flat Tank up to 29" (737mm) Depth
C=Curved Tank From 22" to 29" (559mm to 737mm) Depth
CS=Curved Tank Through 21" (533mm) Depth
253= The 5 includes a fuel stand pipe use 0 for no stand pipe
P=Optional 1/2" (13mm) Female fitting
XX=Measure tank per instructions. Replace XX with dimension

NOTE: For tanks less than 14" (356mm) or over 29" (737mm) in depth, a custom part number will be assigned.
ALL MODELS REQUIRE 2-3/4" (70mm) CLEARANCE ABOVE THE TANK

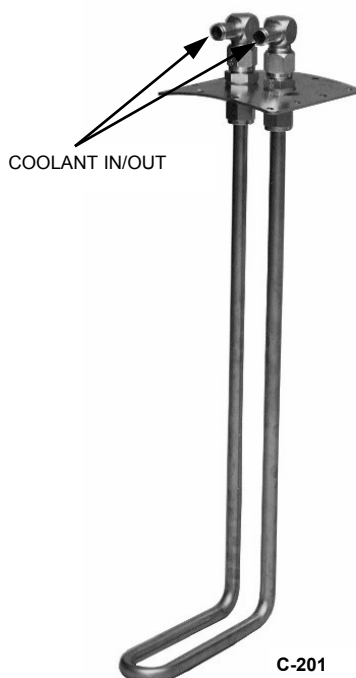


C-201

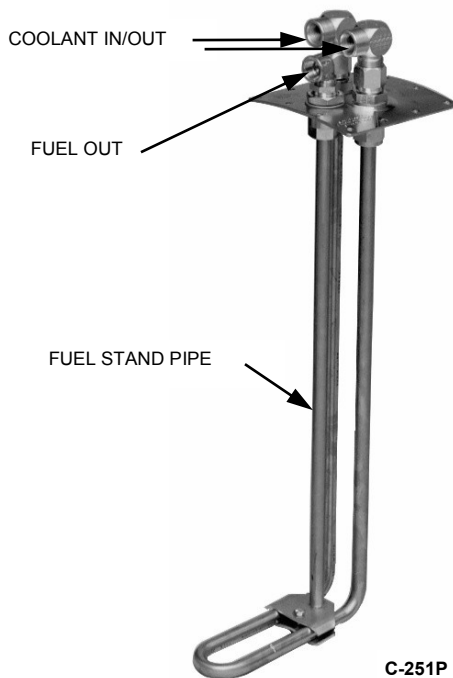

C-251P

WHERE TO MEASURE TANK


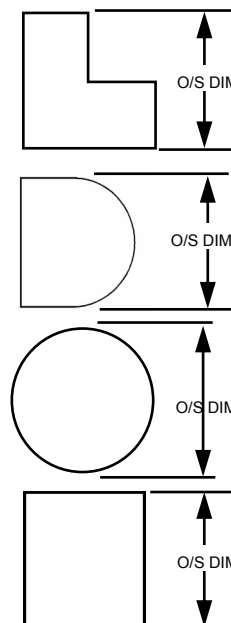


KIT WARMERS WITHOUT THERMOSTAT (FACTORY ASSEMBLY AVAILABLE)

PART NUMBER	TANK DEPTH	COOLANT HOSE CONNECTION	FUEL STAND PIPE
C-201	ROUND 22" THRU 29" (559mm THRU 737MM)	5/8" HOSE BARB	NO
C-201P	ROUND 22" THRU 29" (559mm THRU 737MM)	1/2" FEMALE PIPE THREAD	NO
C-251	ROUND 22" THRU 29" (559mm THRU 737MM)	5/8" HOSE BARB	YES
C-251P	ROUND 22" THRU 29" (559mm THRU 737MM)	1/2" FEMALE PIPE THREAD	YES
CS-201	ROUND 14" THRU 21" (356mm THRU 533mm)	5/8" HOSE BARB	NO
CS-201P	ROUND 14" THRU 21" (356mm THRU 533mm)	1/2" FEMALE PIPE THREAD	NO
CS-251	ROUND 14" THRU 21" (356mm THRU 533mm)	5/8" HOSE BARB	YES
CS-251P	ROUND 14" THRU 21" (356mm THRU 533mm)	1/2" FEMALE PIPE THREAD	YES
F-203	FLAT 14" THRU 29" (356mm THRU 737mm)	5/8" HOSE BARB	NO
F-203P	FLAT 14" THRU 29" (356mm THRU 737mm)	1/2" FEMALE PIPE THREAD	NO
F-253	FLAT 14" THRU 29" (356mm THRU 737mm)	5/8" HOSE BARB	YES
F-253P	FLAT 14" THRU 29" (356mm THRU 737mm)	1/2" FEMALE PIPE THREAD	YES

ARCTIC FOX® IN-TANK FUEL WARMERS

DIMENSIONAL AND REPLACEMENT PART INFORMATION

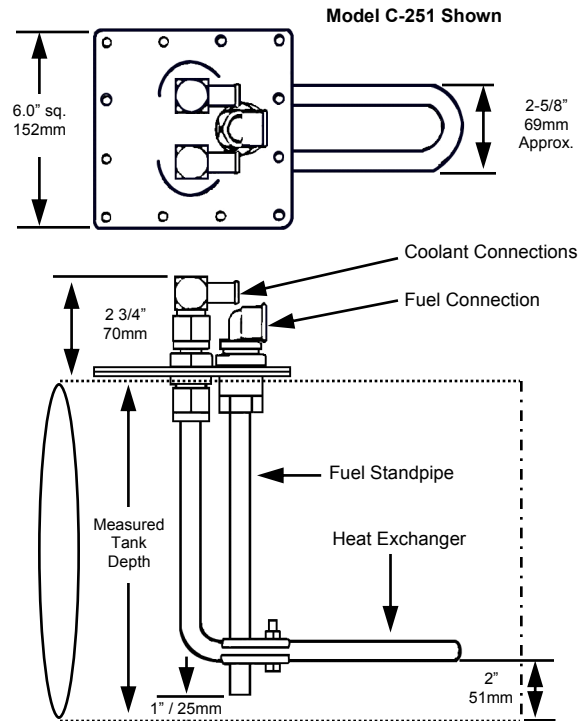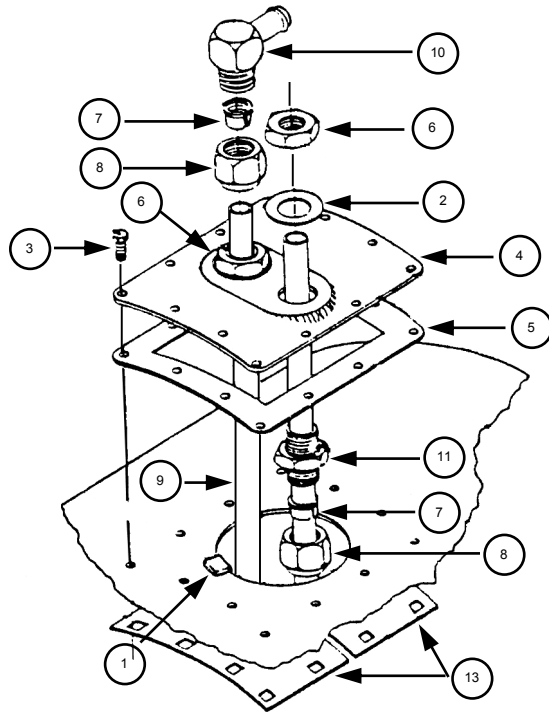

IN-TANK REPLACEMENT PARTS


ITEM #	QTY.	DESCRIPTION	PART NO.
1	4	Retaining Clip—(Included in Installation Kit)	A-649
2	2	Copper Washer	A-616
3	12	Mounting Bolt—(Included in Installation Kit)	A-610
(a) 4	1	Curved 2-Hole Plate—See Option 4 Below for Flat Plate	A-4152-2
5	1	Gasket—(Included in Installation Kit)	A-611
6	2	Locking Nut	A-628
7	4	Split Ring Ferrule	A-621
8	4	Compression Nut	A-639
9	1	Heat Exchanger Tube 28\" / 711mm	A-600
(b) 10	2	5/8\" Tube Fitting Elbow to 5/8\" / 16mm Hose Barb (Includes 7 & 8) - See Option 10 Below for 1/2\" NPT	A-613
11	2	Bushing (Includes 6, 7, & 8)	A-612
12	8	O-Ring Kit (Package Contains 4 Each White & Black O-Rings) - NOT SHOWN	A-617
(c) 13	2	Curved Back-Up Plate—See Option 13 Below for Flat Back-Up Plate	A-2025
(a) Option 4	1	Flat 2-Hole Plate	A-414-2
(b) Option 10	2	5/8\" Tube Fitting Elbow to 1/2\" Female NPT	A-619
(c) Option 13	2	Flat Back-Up Plate	A-2025
Misc.	N/A	Curved Cover Up Kit—22\" Through 29\" / 559mm Through 737mm Tanks	KT-1909
Misc.	N/A	Curved Cover Plate—22\" Through 29\" / 559mm Through 737mm Tanks	A-415-0
Misc.	N/A	Flat Cover Up Kit	KT-1911
Misc.	N/A	Flat Cover Up Plate	A-414-0
Misc.	N/A	Curved Cover Up Kit—Up To 22\" / 559mm Tanks	KT-1910
Misc.	N/A	Curved Cover Up Plate—Up To 22\" / 559mm Tanks	A-541-0

ARCTIC FOX® IN-TANK FUEL & FLUID WARMERS WITH BY-PASS THERMOSTAT


Save time and bother—this is the only fuel warmer you install and forget. Run coast to coast, border to border with fuel warming confidence because you are thermostatically protected. Fuel is warmed to the optimum operating temperature in cold weather with the proven Arctic Fox® fuel warmer in-tank design. An all mechanical thermostat integrated into the unit by-passes the fuel warming loop when fuel temperature reaches optimum operating temperature. This simple “hands off” design is the choice of trucking fleets who demand fool proof operation.

FEATURES AND BENEFITS

- By-passes coolant when fuel temperature reaches optimum operating temperature, allowing this fuel warmer to be plumbed in series with other components such as preheaters, air compressors, and cab heater lines, with out affecting coolant flow.
- Integral design fits all fuel tanks, simplifies plumbing and reduces fittings.
- Fully mechanical. No electrical components to cause maintenance problems.
- Maintains temperature levels which are recommended by engine manufacturers for electronic fuel systems, and helps keep the in-tank fuel within the recommended temperature limits for maximum horsepower.
- Works great with engine preheaters to maintain the “coolant loop”.

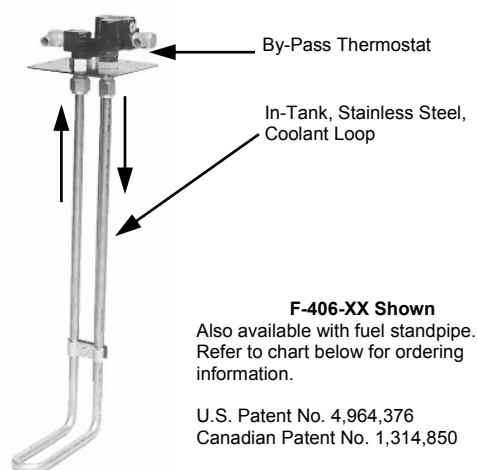

INSTALLATION HARDWARE REPLACEMENT PARTS



A-611 Gasket



A-610 Mounting Bolt




Back Up Plate
A-1795 “C” Models
A-2025 “F” Models
A-1795 “CS” Models



A-649 Tank Clip


WHERE TO MEASURE TANK

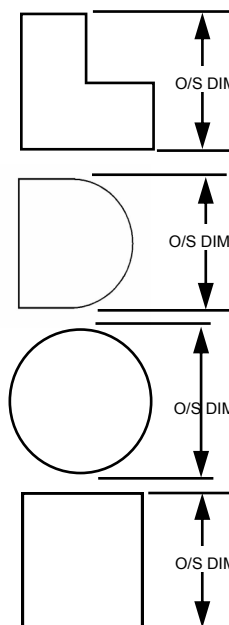

ORDERING INFORMATION: ALL warmers are factory pre-assembled. Order warmers based upon outside tank dimension. Example C-406-XX—if tank outside dimension is 27" / 686mm, order C-406-27.

NOTE: WARRANTY IS VOID OF DISASSEMBLED

PART NUMBER	TANK DEPTH	COOLANT CONNECTION	FUEL STANDPIPE
C-406-XX	Round 22" thru 29" / 559 thru 737mm	5/8" Hose Barb	NO
C-407-XX	Round 22" thru 29" / 559 thru 737mm	3/4" Hose Barb	NO
C-456-XX	Round 22" thru 29" / 559 thru 737mm	5/8" Hose Barb	YES
C-457-XX	Round 22" thru 29" / 559 thru 737mm	3/4" Hose Barb	YES
CS-406-XX	Round 14" thru 21" / 356 thru 533mm	5/8" Hose Barb	NO
CS-407-XX	Round 14" thru 21" / 356 thru 533mm	3/4" Hose Barb	NO
CS-456-XX	Round 14" thru 21" / 356 thru 533mm	5/8" Hose Barb	YES
CS-457-XX	Round 14" thru 21" / 356 thru 533mm	3/4" Hose Barb	YES
F-406-XX	Flat 14" thru 29" / 356 thru 737mm	5/8" Hose Barb	NO
F-407-XX	Flat 14" thru 29" / 356 thru 737mm	3/4" Hose Barb	NO
F-456-XX	Flat 14" thru 29" / 356 thru 737mm	5/8" Hose Barb	YES
F-457-XX	Flat 14" thru 29" / 356 thru 737mm	3/4" Hose Barb	YES

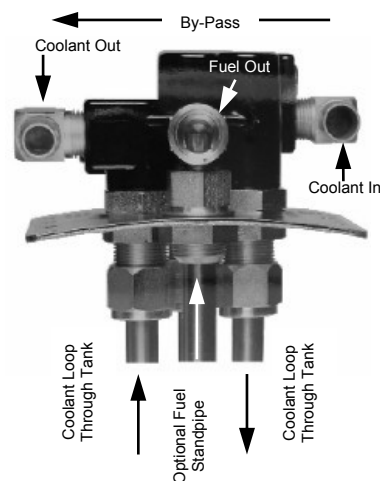

IN-LINE FUEL WARMERS



MIDRANGER™



LINEHAULER™


- A Model for Every Application
- Easy Installation
- Maintenance Free
- No Moving Parts
- 100% Stainless Steel Construction
- Optional Coolant Shut-Off Thermostat

In-line fuel warming is a proven, cost effective method of providing protection against stall-outs due to fuel waxing. Obtain the margin of safety you need in moderate cold weather. In extremely cold weather operation, in-line warmers may be combined with in-tank heaters to provide additional protection.

An advantage of in-line fuel warming is the flexibility of mounting locations. Installation is accomplished by simply routing fuel and coolant lines to the unit. Positioning the unit close to the fuel filter, assures maximum fuel warming efficiency and prevention of costly fuel freezing and clogging at the filter.

PART NUMBER	FUEL FLOW GPM/LPM	MOUNTING HARDWARE	CHECK VALVE See (1) Below	SHUT-OFF THERMOSTAT See (2) Below	DUEL FUEL INLET See (3) Below	ELECTRIC PREHEAT See (4) Below	FUEL PORT	COOLANT PORT
I-702	.1-.5 / .4-1.9	NO	NO	NO	NO	NO	3/8" NPT	3/8" NPT
I-702B	.1-.5 / .4-1.9	YES	NO	NO	NO	NO	3/8" NPT	3/8" NPT
I-703	.1-1.5 / .4-5.7	NO	NO	NO	NO	NO	3/8" NPT	1/2" NPT
I-703B	.1-1.5 / .4-5.7	YES	NO	NO	NO	NO	3/8" NPT	1/2" NPT
I-703BT	.1-1.5 / .4-5.7	YES	YES	78°-95°F 25°-35°C	NO	NO	1/2" NPT	1/2" NPT
I-703BTEH	.1-1.5 / .4-5.7	YES	YES	78°-95°F 25°-35°C	NO	120 VAC	1/2" NPT	1/2" NPT
I-704B	.1-1.5 / .4-5.7	YES	NO	NO	NO	NO	1/2" NPT	1/2" NPT
I-704BT	.1-1.5 / .4-5.7	YES	NO	78°-95°F 25°-35°C	NO	NO	1/2" NPT	1/2" NPT
I-704BTEH	.1-1.5 / .4-5.7	YES	NO	78°-95°F 25°-35°C	NO	120 VAC	1/2" NPT	1/2" NPT
I-705B	.1-1.5 / .4-5.7	YES	YES	NO	YES	NO	1/2" NPT	1/2" NPT
I-705BT	.1-1.5 / .4-5.7	YES	YES	78°-95°F 25°-35°C	YES	NO	1/2" NPT	1/2" NPT
I-706B	.1-1.5 / .4-5.7	YES	NO	NO	YES	NO	1/2" NPT	1/2" NPT
I-706BT	.1-1.5 / .4-5.7	YES	NO	78°-95°F 25°-35°C	YES	NO	1/2" NPT	1/2" NPT
I-714BT	.1-1.5 / .4-5.7	YES	NO	104°-125°F 40°-51°C	NO	NO	1/2" NPT	1/2" NPT
I-714BTEH-2	.1-1.5 / .4-5.7	YES	NO	104°-125°F 40°-51°C	NO	220/240 VAC	1/2" NPT	1/2" NPT
I-724BT	.1-1.5 / .4-5.7	YES	NO	104°-125°F 40°-51°C	NO	NO	1/2" NPT	1/2" NPT

1. Check valve required when mounting heater above top of fuel tank.
2. Allows automatic fuel temperature sensing and control, required for most electronic engines.
3. Allows for simplified dual draw plumbing when retrofitting single draw to dual draw systems.
4. Includes electric coolant pre-heat. 120 VAC cord set not included see page 11 to order, 220 VAC includes cord set.

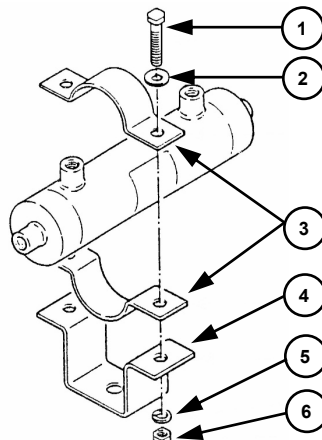

IN-LINE BRACKET REPLACEMENT PARTS

ITEM	QTY.	DESCRIPTION	PART NO.
1	4	3/8" unc x 1.0" Long Bolt	A-321
2	4	3/8" SAE Flat Washer	A-311
3	4	Half Moon Bracket	A-307
4	2	U-Bracket	A-308
5	4	3/8" Split Lock Washer	A-310
6	4	3/8" UNC Hex Nut	A-309

IN-LINE FUEL WARMERS

I-703BTEH—LINEHAULER FUEL WARMER WITH THERMOSTAT AND ELECTRIC PREHEAT

- Includes fuel check valve and 120 volt electric pre-heat.
- Maximum current draw 1/2 amp.
- Cord set not included—See chart below for selection

I-704BTEH—LINEHAULER FUEL WARMER WITH THERMOSTAT AND ELECTRIC PREHEAT

- Same as I-703BTEH above without the check valve
For fuel flow and heat rise data for both models,
see Midranger data on page 12

I-705B—LINEHAULER FUEL WARMER WITH DUAL FUEL INLETS

- Includes check valve to eliminate drain back while changing fuel filter on systems with fuel warmer mounted above top of fuel tank.

I-706B LINEHAULER FUEL WARMER WITH DUAL FUEL INLETS

- Same as I-705B less check valve.

I-705BT—LINEHAULER FUEL WARMER WITH DUAL FUEL INLETS AND THERMOSTAT

- Includes check valve to eliminate drain back while changing fuel filter on systems with fuel warmer mounted above top of fuel tank.
- Automatically controls fuel temperature by stopping coolant flow when fuel temperature through the Tee is approximately 78° to 95° F / 25° to 35° C.


I-706BT—LINEHAULER FUEL WARMER WITH DUAL FUEL INLETS AND THERMOSTAT

- Same as I-705BT less check valve
For fuel flow and heat rise data for all models,
see Linehauler data on page 12


LINEHAULER™ - With Electric Pre-Heat—I-704BTEH Shown



LINEHAULER™ - With Dual Fuel Inlets—I-705BT Shown

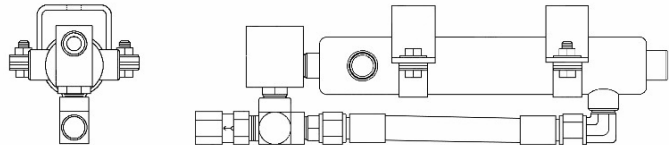


IN-LINE FUEL WARMER REPLACEMENT PARTS

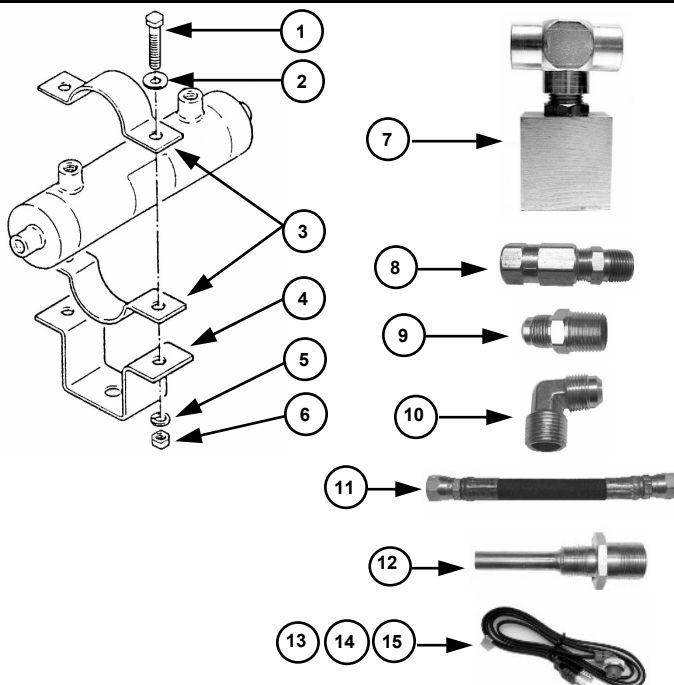

ITEM	QTY.	DESCRIPTION	PART NO.
1	4	3/8" unc x 1.0" Long Bolt	A-321
2	4	3/8" SAE Flat Washer	A-311
3	4	Half Moon Bracket	A-307
4	2	U-Bracket	A-308
5	4	3/8" Split Lock Washer	A-310
6	4	3/8" UNC Hex Nut	A-309
7	1	Thermostat with Tee	S-400T
8	1	Check Valve 1/2" NPT	A-335
9	1	Male Connector #8 x 1/2" NPT	A-287
10	1	Elbow #8 x 1/2" NPT	A-281
11	1	#8 Single Wire Braided Hose	A-703H-8
12	1	63W 120V Heat Element	A-120EK-1
13	1	Power Cord 10' Threaded	EH10
14	1	Power Cord 10' "Y"	EH10Y
15	1	Power Cord 14' "Y"	EH14YK


IN-LINE FUEL WARMERS

MIDRANGER™ DIMENSIONAL AND HEAT RISE DATA

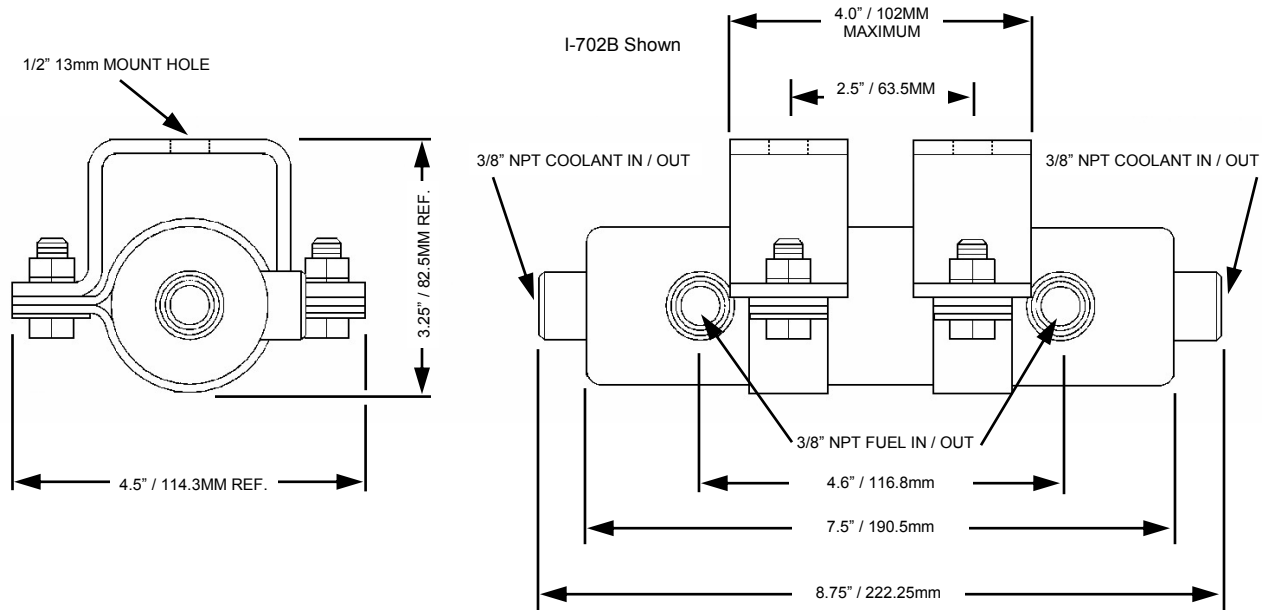


FUEL FLOW GPM/LPM	0.1/0.4	0.2/0.8	0.3/1.1	0.5/1.9	1.5/5.7	2.5/9.5
FUEL TEMP. IN °F / °C	FUEL TEMP. OUT °F / °C	FUEL TEMP. OUT °F / °C	FUEL TEMP. OUT °F / °C	FUEL TEMP. OUT °F / °C	FUEL TEMP. OUT °F / °C	FUEL TEMP. OUT °F / °C
+10 / -12	+99 / +37	+85 / +29	+75 / +24	+63 / +17	+38 / +3	+33 / +1
-20 / -29	+81 / +27	+66 / +19	+57 / +14	+35 / +2	+13 / -11	+5 / -15
-40 / -40	+71 / +22	+55 / +13	+42 / +6	+19 / -7	-7 / -22	-17 / -27

LINEHAULER™ DIMENSIONAL AND HEAT RISE DATA

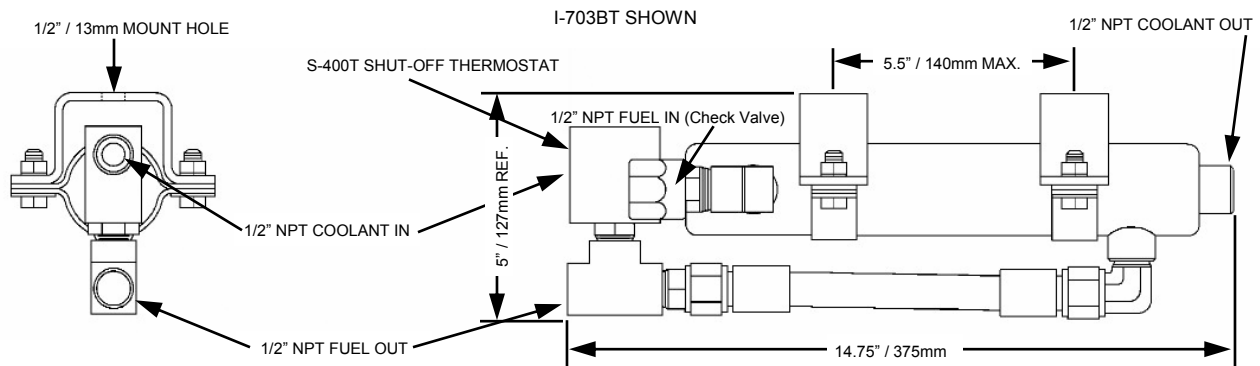

FUEL FLOW GPM/LPM	0.1/0.4	0.2/0.8	0.3/1.1	0.5/1.9	1.5/5.7	2.5/9.5
FUEL TEMP. IN °F / °C	FUEL TEMP. OUT °F / °C	FUEL TEMP. OUT °F / °C	FUEL TEMP. OUT °F / °C	FUEL TEMP. OUT °F / °C	FUEL TEMP. OUT °F / °C	FUEL TEMP. OUT °F / °C
+10 / -12	+112 / +45	+100 / +38	+90 / +32	+72 / +22	+48 / +9	+39 / +4
-20 / -29	+95 / +35	+86 / +30	+78 / +26	+59 / +15	+20 / -6	+10 / -12
-40 / -40	+86 / +30	+74 / +23	+61 / +16	+34 / +1	+2 / -17	-4 / -20

THERMAL LINER 15 FLUID WARMER



END VIEW—15 TUBE BUNDLE

Engine coolant or other warm fluid is routed through 15 tubes welded inside the housing to provide heat. Fluid being heated is routed through the baffled shell side. All stainless steel construction eliminates corrosion and contamination of your fuel or fluid.

ALTERNATIVE FUELS

Arctic Fox steps to the front in the alternative fuels market with an easy way to convert natural gas fuels to combustible energy sources. The efficiency of the 15 tube bundle raises the ultra cold natural gas to a useable temperature and raises the fuel pressure through the heating process. See SF-2587 series Thermal Liners on page 14 for maximum operating pressures up to 350 psi (2,413kPa).

DIESEL FUEL

Arctic Fox leads the industry in diesel fuel warming—thousands of units have covered millions of miles in over-the-road equipment. Warmed diesel fuel does not gel in cold temperatures and, in areas where low grade fuel is prevalent, heating raises the efficiency while lowering emissions. Large off-highway equipment with 2-5 GPM / 8-19 LPM fuel flow can easily be handled with one of these three Thermal Liner fluid warmer sizes. In series, these units serve the largest diesel fuel consumers like locomotives and huge haul trucks. Easy installation in the fuel line (1/2" NPT or 1" NPT fittings), and a reasonable cost guarantees warm fuel for trouble free operation in cold climates.

OTHER FLUIDS

The possibilities are endless to utilize the efficient Thermal Liner fluid warmer design. Simple in-line installation means ultimate flexibility wherever engine coolant is available to recycle the valuable heat that would otherwise be lost.



THERMAL LINER® 15 DIMENSIONAL & BRACKET REPLACEMENT PARTS INFORMATION

NOTE: All models made of 304 Stainless Steel—Maximum Operating Pressure 25 psi (172.4kPa) - OD 2.375" (60mm)

Part Number	Tube Port	Shell Port	Tube Length	Total Length	Surface Area	Item	Qty	Description	Part #
SF-1542-18	1/2" NPT	1/2" NPT	18.0"/457mm	22.0"/559mm	320 "2/2064.5cm ²	1	4	3/8" UNC X 1.0" Long Bolt	A-321
SF-1542-24	1/2" NPT	1/2" NPT	24.0"/610mm	28.0"/711mm	426"2/2748.4cm ²	2	4	3/8" SAE Flat Washer	A-311
SF-1542-30	1/2" NPT	1/2" NPT	30.0"/762mm	34.0"/864mm	532"2/3432.3cm ²	3	4	Half Moon Bracket	A-1356
SF-1562-18	1" NPT	1" NPT	18.0"/457mm	22.0"/559mm	320 "2/2064.5cm ²	4	2	U-Bracket	A-1361
SF-1562-24	1" NPT	1" NPT	24.0"/610mm	28.0"/711mm	426"2/2748.4cm ²	5	4	3/8" Split Lock Washer	A-310
SF-1562-30	1" NPT	1" NPT	30.0"/762mm	34.0"/864mm	532"2/3432.3cm ²	6	4	3/8" UNC Nut	A-309
SF-5139-40	1-1/2" NPT	1" NPT	40.0"/1016mm	45.0"/1143mm	710"2/4580.6cm ²				
SF-5139-45	1-1/2" NPT	1" NPT	45.0"/11423mm	50.0"/1270mm	800"2/5161.3cm ²				
SF-5139-50	1-1/2" NPT	1" NPT	50.0"/1,270mm	55.0"/1397mm	885"2/5709.7cm ²				
STT-2537*	1/2" NPT	1" NPT	30.0"/762mm	34.0"/864mm	532"2/3,432.3cm ²				
STT-2537-78-95**	1/2" NPT	1" NPT	30.0"/762mm	34.0"/864mm	532"2/3,432.3cm ²				

*STT-2537 Has integral coolant shut-off thermostat (104°-125° F / 40°-52° C)

**STT-2537-78-95 Has integral coolant shutoff thermostat (78°-95° F / 25°-35° C)

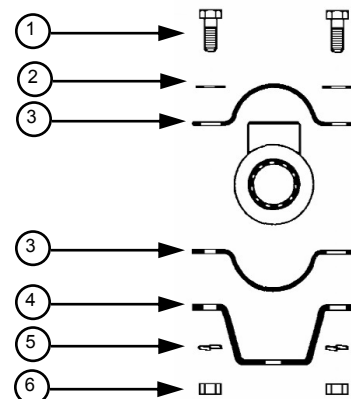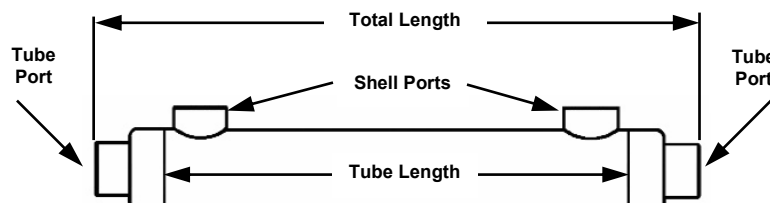

ALTERNATIVE FUEL HEAT EXCHANGERS—CNG

It is no longer necessary to apply an “off-the-shelf” heat exchanger to alternative fuel applications. Now you can choose **heat exchangers designed for applications in alternative fuels**.

THE PROBLEM:

Natural gas is stored in tanks on board the vehicle at “tank pressures” ranging from 250 to 3600 psi (1720.7 to 24821.1kPa). A regulator is used to regulate this pressure to a value typically around 115psi (792.9kPa). As a result of the pressure drop through the regulator, the natural gas reaches temperatures nearing –200°F (-128° C). The Arctic Fox heat exchanger is utilized to prevent the natural gas from dropping below an acceptable temperature based on engine temperature and load. At low fuel rates, a thermostat may be required to prevent heating of the gas above an acceptable temperature.

THE SOLUTION:


The high quality, 100% stainless steel heat exchangers from Arctic Fox, LLC. designed for CNG applications.



- Simple, compact design fits in areas with limited space
- 100% stainless steel construction for durability and fuel compatibility
- 350psi (2413kPa) working pressure, 100% independent lab certified
- Minimum burst pressure (destructive test) 6000psi (41369kPa)
- 15 tube heat exchanger maximizes heat transfer surface
- Integral thermostat option available (SFT models)
- Fuel ports can be:
NPTF
Swagelok (add 1 inch / 25.4mm to fuel port protrusion for Swagelok fittings)
or custom

PART NUMBER	GAS PORT SIZE	COOLANT PORT SIZE	TUBE LENGTH	TOTAL LENGTH	SURFACE AREA	INTEGRAL THERMOSTAT
SF-2587-6	1/2" NPT	1/2" NPT	6.0"/152mm	10.0"/245mm	108"²/697cm²	NO
SF-2587-8	1/2" NPT	1/2" NPT	8.0"/203mm	12.0"/305mm	143"²/923cm²	NO
SF-2587-10	1/2" NPT	1/2" NPT	10.0"/254mm	14.0"/356mm	179"²/1155cm²	NO
SF-2587-12	1/2" NPT	1/2" NPT	12.0"/305mm	16.0"/406mm	214"²/1381cm²	NO
SFT-2587-1/2NPT-6	1/2" NPTF	1/2" NPT	6.0"/152mm	12.5"/318mm	108"²/697cm²	YES
SFT-2587-1/2NPT-8	1/2" NPTF	1/2" NPT	8.0"/203mm	14.5"/368mm	143"²/923cm²	YES
SFT-2587-1/2NPT-10	1/2" NPTF	1/2" NPT	10.0"/254mm	16.5"/419mm	179"²/1155cm²	YES
SFT-2587-1/2NPT-12	1/2" NPTF	1/2" NPT	12.0"/305mm	18.5"/469mm	214"²/1381cm²	YES
SFT-2587-6-SWGLK-X/XCP	1/2" Swagelok	See Note	6.0"/152mm	13.0"/330mm	108"²/697cm²	YES
SFT-2587-8-SWGLK-X/XCP	1/2" Swagelok	See Note	8.0"/203mm	15.0"/381mm	143"²/923cm²	YES
SFT-2587-10-SWGLK-X/XCP	1/2" Swagelok	See Note	10.0"/254mm	17.0"/432mm	179"²/1155cm²	YES
SFT-2587-12-SWGLK-X/XCP	1/2" Swagelok	See Note	12.0"/305mm	19.0"/483mm	214"²/1381cm²	YES


NOTE: For SFT-2587 with Swagelok fuel ports, coolant ports can be 1/2", 5/8", or 3/4" hose barb—substitute desired hose barb size for the X/X designation in the part number—Example: SFT-2587-SWGLK-3/4CP will have 3/4" hose barbs included in the hardware package.

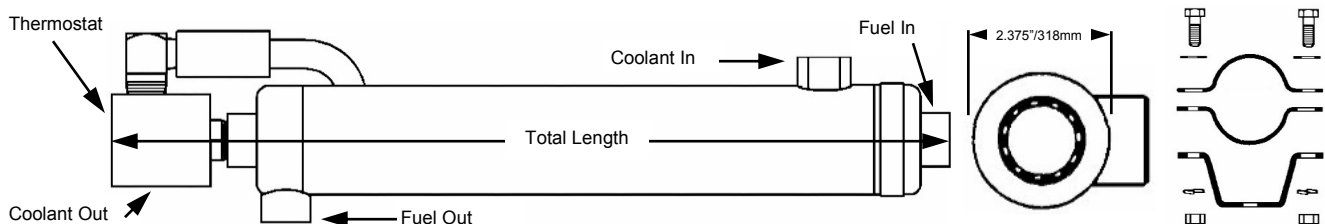

WARNING: Maximum recommended service life for SF-2587 and SFT-2587 models is 6 years from the date of manufacture as labeled on the device. Replace with a new unit when the device has reached 6 years of service. You may contact Arctic Fox, LLC for the possibility of obtaining re-certification. **ARCTIC FOX, LLC DOES NOT GUARANTEE IT WILL OFFER A RE-CERTIFICATION PROGRAM**

IN-LINE HEAT EXCHANGERS—Biodiesel

In-Line Fluid Warmers—B-100 Biodiesel Compatible

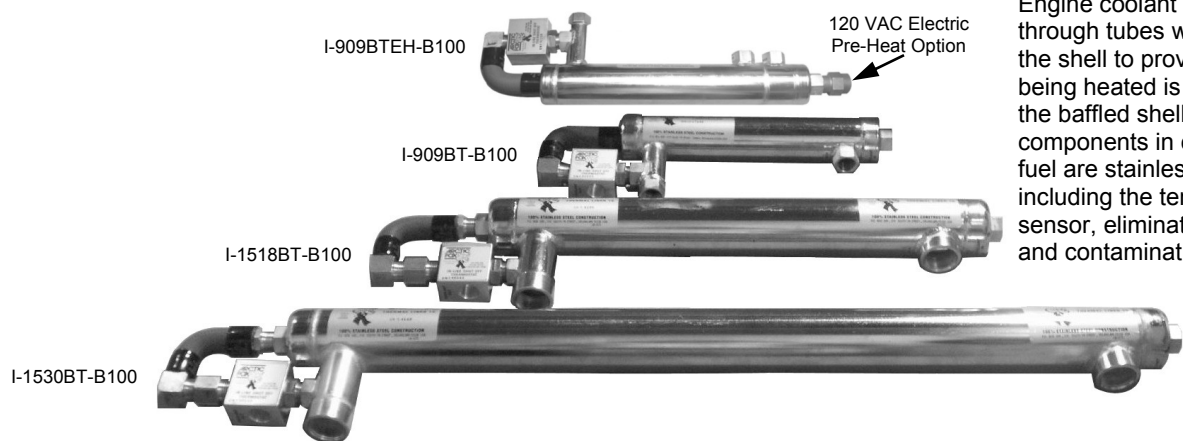

Engine coolant is routed through tubes welded inside the shell to provide heat. Fuel being heated is routed through the baffled shell side. All components in contact with the fuel are stainless steel, including the temperature sensor, eliminating corrosion and contamination of your fuel.

DIESEL FUEL & BIODIESEL BLENDS UP TO B-100

Arctic Fox leads the industry in diesel fuel warming—thousands of units have covered millions of miles in over-the-road and off-road equipment. Warmed diesel fuel does not gel in cold temperatures and, in areas where low grade fuel is prevalent, heating raises the efficiency. Fuel flow of most automotive engines can be handled with one of these four In-Line fluid warmer sizes. Multiple units in parallel, serve the larger diesel fuel consumers like locomotives, huge haul trucks, and high horsepower oil field and mining equipment. Easy installation in the fuel line, and a reasonable cost guarantees warm fuel for trouble free operation in cold climates. Integral, thermostatic control maintains optimum fuel temperature automatically.


OTHER FLUIDS

The possibilities are endless to utilize these efficient In-Line fluid warmers. Simple in-line installation means ultimate flexibility wherever engine coolant is available to recycle the valuable heat that would otherwise be lost.

DIMENSIONAL & BRACKET REPLACEMENT PARTS INFORMATION


NOTE: All models made of 304 Stainless Steel—Maximum Coolant Operating Pressure 25 psi (172.4kPa)
Pre heat option does NOT include power cord—Contact Arctic Fox for proper cord to match your application

Part Number	Coolant Port	Fuel Port	Tube Length	Tube O.D.	Total Length	Surface Area	Pre Heat Option
I-909BT-B100	1/2" NPT	1/2" NPT	9.75"/248mm	2.0"/51mm	15.5"/394mm	100"²/645.2cm²	No
I-909BTEH-B100	1/2" NPT	1/2" NPT	9.75"/248mm	2.0"/51mm	18.5"/470mm	100"²/645.2cm²	120 VAC
I-1518BT-B100	1/2" NPT	1" NPT	18.0"/457mm	2.375"/60mm	25.5"/648mm	320"²/2064.5cm²	No
I-1530BT-B100	1/2" NPT	1" NPT	30.0"/762mm	2.375"/60mm	37.0"/940mm	532"²/3432.3cm²	No

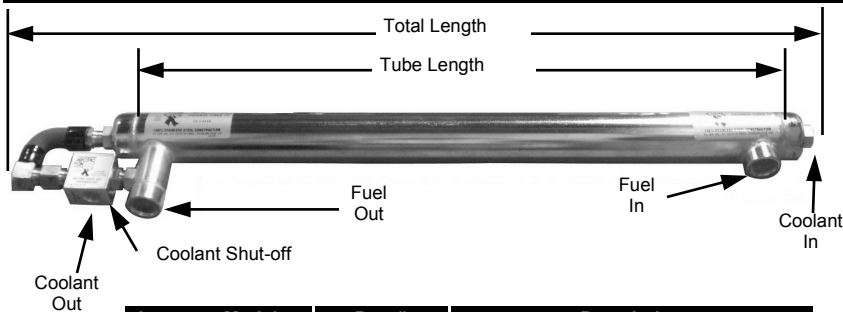


NOTE: Bracket components listed below are included with each unit in the proper quantity to support the heat exchanger.

Item	Model	Part #	Description
1	All	A-321	3/8" UNC X 1.0" Long Bolt
2	All	A-311	3/8" SAE Flat Washer
3	I-909 I-15	A-307 A-1356	Half Moon Bracket
4	I-909 I-15	A-308 A-1361	U-Bracket
5	All	A-310	3/8" Split Lock Washer
6	All	A-309	3/8" UNC Nut

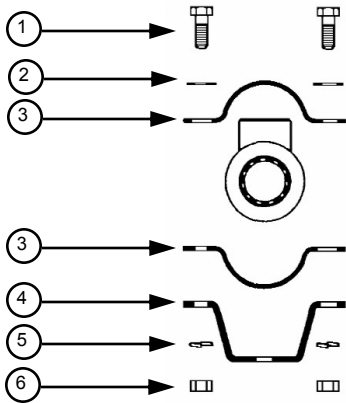

HOTLINE® ELECTRIC IN-LINE FUEL HEATER

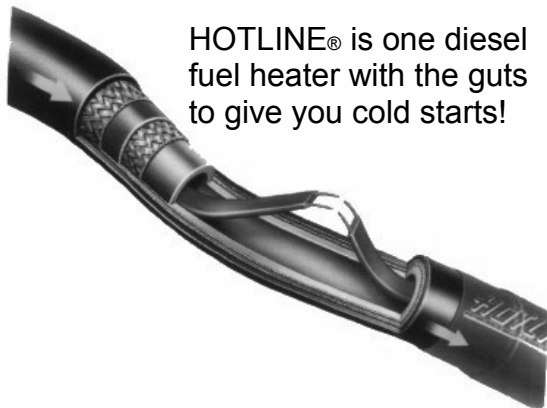


HOTLINE® is one diesel fuel heater with the guts to give you cold starts!

- Before starting, the HOTLINE® can thaw frozen diesel fuel in just 3 to 4 minutes, using only 2% of available battery capacity, *before* you start your engine.
- On the road simply flip a switch, and within 60 seconds, HOTLINE® will begin eliminating fuel waxing which causes power loss.
- Modular design allows for easy installation and service.
- Works in conjunction with coolant heaters for complete fuel system protection.
- All kits are complete with all electrical components and wiring harness.
- Optional thermostatic shut-off available.

POWER	600 WATT		450 WATT		300 WATT		150 WATT	
LENGTH	12 VOLT	24 VOLT	12 VOLT	24 VOLT	12 VOLT	24 VOLT	12 VOLT	24 VOLT
12' / 3.7m	D3085-1180	D3085-2180	D3085-1152	D3085-2152	D3085-1138	D3085-2138	N/A	N/A
8.5' / 2.6m	D3085-1168	D3085-2168	D3085-1146	D3085-2146	D3085-1133	D3085-2133	N/A	N/A
6.0' / 1.8m	N/A	N/A	D3085-1141	N/A	D3085-1130	D3085-2130	D3085-1126	D3085-2126
4.5' / 1.4m	N/A	N/A	N/A	N/A	D3085-1128	D3085-2128	D3085-1122	D3085-2122
2.0' / 0.6m	N/A	N/A	N/A	N/A	N/A	N/A	D3085-1118	D3085-2118
Max Current Draw (1)	45	23	31	16	21	11	10	5
Min Alternator Capacity *(2)	130	870	105	70	85	55	75	45
Optional Thermostatic Shut-Off Kit 12 & 24 Volt	Part Number		Off Temp		On Temp		Amp Draw	
	D3065-2338		80°F / 27°C		55°F / 13°C		Negligible	

- (1) Current draw shown is maximum sustained amperage.
 (2) Minimum alternator capacity is only a guideline. Total system load analysis is required for accurate battery/charging system specification. Refer to maximum sustained current draw and consult your vehicle manufacturer for advisement whenever adding any aftermarket auxiliary current load.

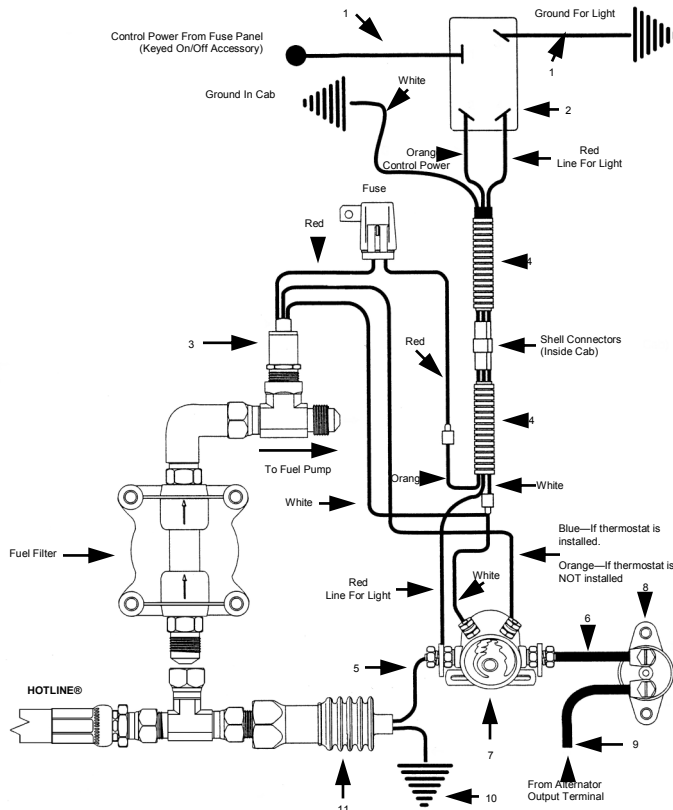

ITEM	DESCRIPTION	PART NUMBER
1	Black Jumper 14 Gauge	D3061-1677
2	12V Lighted Toggle Switch	D3061-1582
	24V Lighted Toggle Switch	D3061-1584
3	Optional Thermostat Kit-20" Long Wires	D3065-2338
4	3-Wire Harness Kit-206" Long	D3061-1735
5	Wire Jumper magnetic Switch-144" Long	D3065-2360
6	#10 Jumper Main Power-102" long	D3061-1664
7	12V Magnetic Switch	D3061-1573
	24V Magnetic Switch	D3061-1575
8	12V—60 Amp Circuit Breaker	D3061-1560
	24V—35 Amp Circuit Breaker	D3061-1565
9	#4 Jumper Main Power-47" Long	D3061-1638
10	Wire Jumper Mod. Ground-96" Long	D3065-2537
11	Insulating Boot	D3065-2284

ELECTRIC FLUID RESERVOIR HEATERS



- Easy Peel-And-Stick application with pressure sensitive adhesive.
- May be installed in sub-zero temperatures.
- Mounts to any smooth, metal surface.
- No need to cut hoses, remove plugs, or lose anti-freeze or oil.
- Aluminum backing provides even heat distribution.
- Reduces pump cavitation, blown seals and burst hydraulic components.
- Reduces engine wear by improving the flow of engine oil.
- Models available in 120 and 240 VAC as well as 12 & 24 VDC.


EH-2801 Through EH-3210 are covered by USA Patent 5,017,758

DESCRIPTION				APPLICATION RANGE				
PART NUMBER	WATTS VOLTS	AMP. DRAW	INCHES MM	ENGINE OIL	DIESEL FUEL	WATER	HYDRAULIC OIL	POWER PLUG
EH-2801	125 120 AC	1	2.25 X 4 57 X 102	1.5-4 qt. 1.3-3.8L	N/A	5-20 gal. 18.9-75.7 L	1-10 gal. 3.8-37.9 L	3-Prong NEMA 5-15P
EH-2802	250 120 AC	2.1	3.5 X 4.5 89 X 114	4.5-12 qt. 4.3-11.4 L	N/A	24-45 gal. 90.9-170.3 L	10-30 gal. 37.9-113.6 L	3-Prong NEMA 5-15P
EH-2805	500 120 AC	4.2	5 X 7 127 X 178	3-6 gal. 11.4-22.7 L	40-60 gal. 151.4-227.1 L	50-100 gal. 189.2-378.5 L	20-50 gal. 75.7-189.3 L	3-Prong NEMA 5-15P
EH-2810	1000 120 AC	8.3	6 X 10.75 152 X 273	6.5-12 gal. 24.6-45.4 L	50-100 gal. 189.3-378.5 L	100-200 gal. 378.5-757 L	50-100 gal. 189.3-378.5 L	3-Prong NEMA 5-15P
EH-3201	125 220 AC	0.1	2.25 X 4 57 X 102	1.5-4 qt. 1.3-3.8 L	N/A	5-20 gal. 18.9-75.7 L	1-10 gal. 3.8-37.9 L	NONE
EH-3202	250 220 AC	1.1	3.5 X 4.5 89 X 114	4.5-12 qt. 4.3-11.4 L	N/A	24-45 gal. 90.9-170.3 L	10-30 gal. 37.9-113.6 L	NONE
EH-3205	500 220 AC	2.3	5 X 7 127 X 178	3-6 gal. 11.4-22.7 L	40-60 gal. 151.4-227.1 L	50-100 gal. 189.2-378.5 L	20-50 gal. 75.7-189.3 L	NONE
EH-3210	1000 220 AC	4.5	6 X 10.75 152 X 273	6.5-12 gal. 24.6-45.4 L	50-100 gal. 189.3-378.5 L	100-200 gal. 378.5-757 L	50-100 gal. 189.3-378.5 L	NONE
EH-2874	80 12 DC	6.7	1.5 X 8 38 X 203	N/A	N/A	3-12 gal. 11.4-45.4 L	.5-6 qt. .5-5.7 L	NONE
EH-3659	250 12 DC	20.8	5 X 5 127 X 127	N/A	N/A	24-45 gal. 90.9-170.3 L	10-30 gal. 37.9-113.6 L	NONE
EH-3660	370 12 DC	30.8	7 X 5 178 X 127	N/A	N/A	35-65 gal. 132.5-246.1 L	15-45 gal. 56.8-170.3 L	NONE
EH-4111	80 24 DC	3.4	4 X 1.5 101 X 38	N/A	N/A	3-12 gal. 11.4-45.4 L	.5-6 qt. .5-5.7 L	NONE
EH-4608	80 12 DC	6.7	3.25 X 1.75 83 X 45	N/A	N/A	3-12 gal. 132.5-246.1 L	.5-6 qt. .5-5.7 L	NONE
EH-6282	7 12 DC	0.6	1 X 2 25 X 51	Typical Application: spot heating for small valves or fittings				NONE


NOTE:

- When properly installed, heaters may be operated continuously if necessary.
- Typical operation time is three to five hours.
- Heaters may be used with a timer of the proper capacity to control operation time.
- Actual temperature of the fluid being heated cannot be calculated, and will vary with the fluid type, fluid volume, tank material and size, protection from heat loss, as well as climate conditions.


BATTERY HEATERS—BH-3100 SERIES

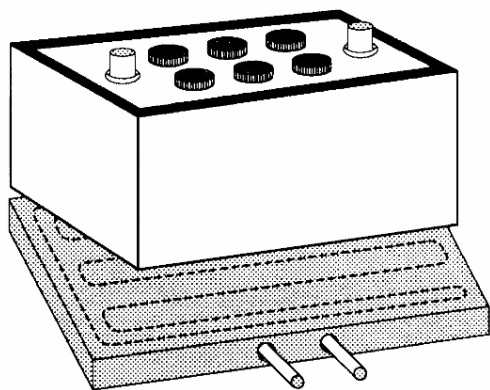


- Available for all group 31 battery configurations.
- Custom sizes quoted upon request.
- Utilizes heat energy from engine cooling system or diesel fired coolant heater.
- Increases available cold cranking amps.
- Reduces required battery charge time.
- Extends battery life.
- Durable stainless steel coolant tubes.
- Light weight aluminum heating plate.
- 1/2" NPT coolant connections.
- Simplified installation for most applications.




NOTE:
All models require minimum 1" / 25.4mm clearance above the batteries.




BH-3101



BH-3102




BH-3103



BH-3104



BH-3110



BH-3113



BH-3119






BH-3124

DIMENSIONAL INFORMATION		
PART NUMBER	LENGTH INCHES/mm	WIDTH INCHES/mm
BH-3101	12-7/8 / 327	6-5/8 / 168
BH-3102	13 / 330	13 / 330
Note: BH-3102—Both batteries may be place parallel or perpendicular to the coolant ports.		
BH-3103	21 / 533	14 / 356
BH-3104	27 / 686	14 / 356
Note: BH-3104—All 4 batteries may be place parallel or perpendicular to the coolant ports, or 2 either way.		
BH-3110	21-1/2 / 546	11 / 279
BH-3113	21-1/2 / 546	11 / 279
BH-3119	21 / 526	8-1/2 / 216
BH-3124	25-1/4 / 641	6-1/4 / 159

NOTE
IN SCHEMATIC BELOW, BATTERY WARMING IS DISCONTINUED WHEN CAB HEATER TEMPERATURE SWITCH IS OFF.

Typical battery heater coolant schematic for applications which utilize positive cab heater coolant flow shut-off valves as a means of temperature control.

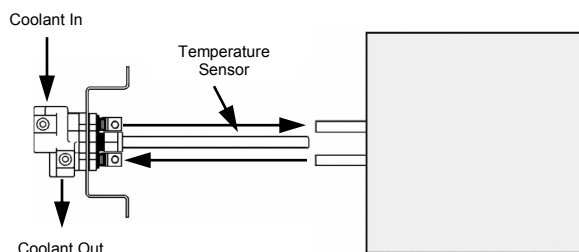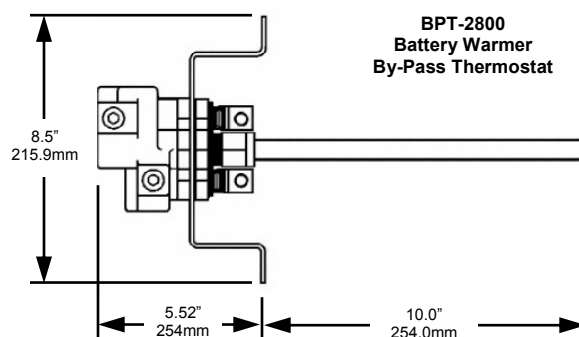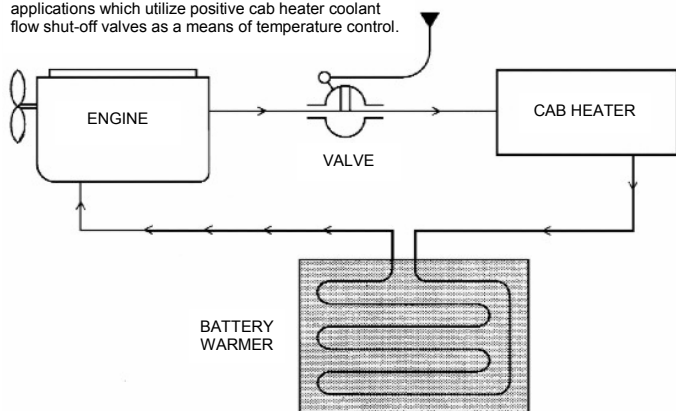

Schematic for Battery Warmer with Optional By-Pass Thermostat

HYDRAULIC FLUID WARMERS & ACCESSORIES

APPLICATIONS: Hydraulic Fluid—Water—Other Fluids

PRODUCT DESIGNS:

COOLANT to FLUID Heat Exchangers

Hydra Liner—Hydraulic Hot Fox—Mini Heat Exchanger—Custom Formed Tubes

Electric Warmers

120VAC, 240VAC, 12VDC, 24VDC—See Page 17

- Warm oil flows free.
- Reduce pump cavitation and resulting damage.
- Increase productivity—no more idle equipment or workers waiting for hydraulics to warm up.
- Versatile design allows for use on equipment for Logging, Construction, Mining, Waste Hauling, Utility and Maintenance Vehicles.

HYDRA LINER SERIES

- All stainless steel construction.
- Large surface area exposed to fluid to maximize heat rise.
- Threads into standard 2" NPT female pipe thread or 2" Straight Thread O-Ring (STOR) coupling. (Listed Below)
- Excellent coolant flow capacity, utilizing 3/4" NPT coolant connections.
- 5-year—600,000 mile (965,000km) warranty.
- Install multiple units for larger tanks or faster heat rise.


PART NUMBER	"A" DIMENSION NOMINAL	"B" DIMENSION NOMINAL	SURFACE AREA NOMINAL	BTU/hr NOMINAL(1)	TYPICAL APPLICATION TO -20°F / -29°C (2)	TYPICAL APPLICATION TO -40°F / -40°C (2)
H-4000-8 H-4000-8-STOR	7 Inches 178mm	10 Inches 254mm	105 In ² 8 dm ²	Water 4,200 Oil 2,100	Up to 20 US gallons 76 Liters	Up to 10 US gallons 38 Liters
H-4000-12 H-4000-12-STOR	11 Inches 280mm	14 Inches 356mm	180 In ² 12 dm ²	Water 7,200 Oil 3,600	Up to 35 US Gallons 133 Liters	Up to 17 US gallons 38 Liters
H-4000-16 H-4000-16-STOR	15 Inches 381mm	18 Inches 457mm	250 In ² 16 dm ²	Water 10,000 Oil 5,000	Up to 50 US Gallons 190 Liters	Up to 10 US gallons 66 Liters
H-4000-20 H-4000-20-STOR	19 Inches 483mm	22 Inches 559mm	315 In ² 20 dm ²	Water 13,000 Oil 6,500	Up to 63 US Gallons 239 Liters	Up to 25 US gallons 95 Liters
H-4000-24 H-4000-24-STOR	23 Inches 584mm	26 Inches 660mm	385 In ² 24 dm ²	Water 16,000 Oil 8,000	Up to 77 US Gallons 292 Liters	Up to 38 US gallons 146 Liters

(1) Nominal BTU/hr based upon 180°F / 82°C Coolant flowing at 5 US Gallons / 19 Liters per minute.

Water—beginning temperature at +35°F / +2°C

Oil—ISO 32 Hydraulic Oil beginning temperature -20°F / -29°C.

(2) Actual temperature rise will be affected by factors such as coolant temperature and flow rate, specific heat capacity of fluids and air movement around reservoir.

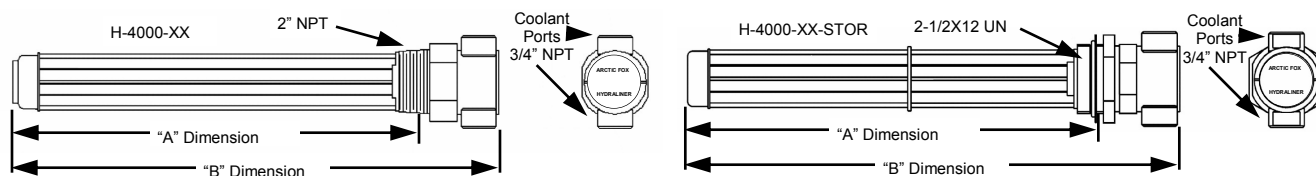

WELD ON TANK ADAPTERS


PART NUMBER	DESCRIPTION	APPLICATION
A-3228HD	Steel—Schedule 80 2" NPT Female Coupling	Preferred for most installations on steel tanks
A-3228AHD	Aluminum T-6061—Schedule 80 2" NPT Female Coupling	Preferred for most installations on aluminum tanks
A-3228HD-STOR	Steel—Combination 32 STOR & 2" NPT	May be used to install either design Hydra Liner
A-3228SSHD-STOR	Stainless Steel—Combination 32 STOR & 2" NPT	May be used to install either design Hydra Liner
A-5878HD	Steel—Half Coupling—32 STOR	Used when external tank clearance is limited
A-5878SSHD	Stainless Steel—Half Coupling—32 STOR	Used when external tank clearance is limited
IS43THCK	Stainless Steel—2" NPT Half Coupling 300#	Preferred for most installations on Stainless Steel Tanks
IS4CTHSP114	Stainless Steel—2" NPT Half Coupling 150#	Used mainly for thin walled tanks to minimize welding distortion
TWF-32	Steel—Flange 32 STOR	Used when external clearance is limited
TWF-32N	Steel—Flange 2" NPT	Used when external clearance is limited

HOT FOX™ HYDRAULIC FLUID WARMER



Used on applications which require maximum heat exchangers in a concentrated area.

NOTE: For extreme cold weather applications, multiple hydraulic HOT FOX™ fluid warmers may be desired.

Coolant Connections—1/2" NPT

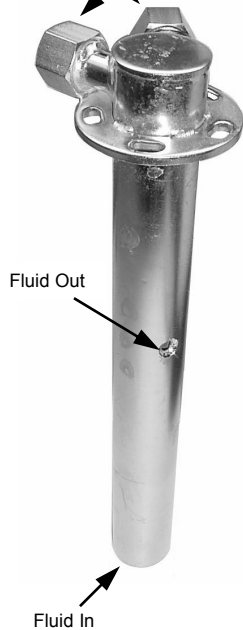

PART NUMBER	TOTAL LENGTH (INCH / MM)	MAXIMUM TANK CAPACITY (USG / L)
SHH-1844-09	8-1/4 / 210	8 / 30
SHH-1844-11	10-1/4 / 260	10 / 38
SHH-1844-12	11-1/4 / 286	12 / 45
SHH-1844-13	12-1/4 / 311	14 / 53
SHH-1844-16	15-1/4 / 387	17 / 64
SHH-1844-19	18-1/4 / 464	20 / 76
SHH-1844-21	20-1/4 / 514	22 / 83
SHH-1844-23	22-1/4 / 565	25 / 95
SHH-1844-25	24-1/4 / 616	28 / 106
SHH-1844-26	25-1/4 / 641	32 / 121

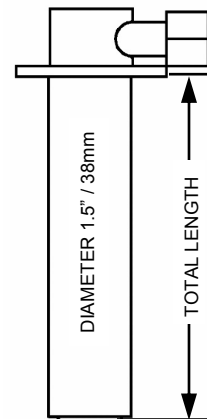

Recommendation: The HFG & SHH series HOT FOX™ warmers can mount into a standard USA fuel gauge sending unit opening.

For extreme vibration applications and all applications involving horizontal or tank bottom vertical mounting, the A-1721 or A-2060 shown below, is required.

NOTE: For installations into non-reinforced gauge hole openings or in tanks manufactured of 14 gauge (0.075" / 1.9mm) and lighter steel, or 0.100" / 2.5mm and lighter aluminum, the appropriate adapter kit KT-826F, KT-827C, or KT-831CS is suggested.

ROUND TANKS

KT-827C for 22"-29"/559-737mm Dia.
KT-831CS for 14"-21"/356-533mm Dia.

Adapts standard Arctic Fox fuel warmer mount to Hot Fox™ mount. Reinforces tank opening.

KIT COMPONENTS

Adapter Plate 6"/152mm Square (1)
A-827 for KT-827C
A-831 for KT-831CS
Backing Plates (2) A-1795
Clips (4) A-649
Gasket (1)—A-611
Mounting Bolts (12) - A-610
Template (1)—A-708

FLAT TANKS

KT-826F

Adapts standard Arctic Fox fuel warmer mount to Hot Fox™ mount. Reinforces tank opening.

KIT COMPONENTS

Adapter Plate 6"/152mm Square (1)
A-826
Backing Plates (2) A-2025
Clips (4) A-649
Gasket (1)—A-611
Mounting Bolts (12) - A-610
Template (1)—A-708

Threaded Adapter
Fits 1-1/2" & 2" NPT Couplings


A-1721
(To -40° F/C)
Parts Included
(1) A-1792 Gasket
(2) A-1726 O-Ring

A-1721F
(To -90° F / -67°/C)
Parts Included
(1) A-1792 Gasket
(2) A-2758 O-Ring

Weld-In Adapter
For Fuel or Hydraulic Tanks

A-2060 (Steel)
A-2060-A (Alum.)
(To -40° F/C)
Parts Included
(1) A-1792 Gasket
(2) A-1726 O-Ring

A-2060F (Steel)
A-2060-AF (Alum.)
(To -90° F / -67°/C)
Parts Included
(1) A-1792 Gasket
(2) A-2758 O-Ring

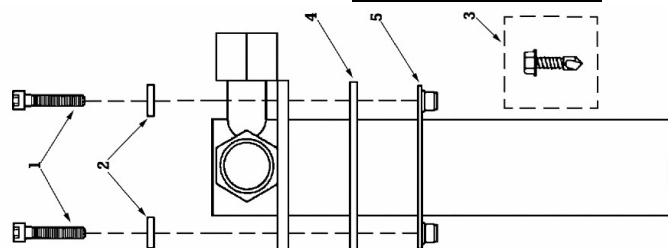


ITEM	QTY	DESCRIPTION	PART #
1	5	#10-32 UNF x 1.0 Cap Screw	A-857
2	5	Stainless Steel Washer	A-861
3	2	Self Drill / Tap Screw	A-608
4	1	HOT FOX™ Fuel Warmer Gasket	A-841
5	1	Back Up Plate / Template	A-834

HYDRAULIC FLUID WARMERS & ACCESSORIES

MINI HEAT EXCHANGER

- Utilizes engine coolant for small reservoir applications
- Engine oil pans
- Small hydraulic reservoirs 1 to 5 gallons / 4-19 Liters


PART NUMBER	ADAPTER TYPE	TUBE DIAMETER	MATERIAL	DIM "A"	DIM "B"
H-2697-5	3/4" NPT	7/8" / 16MM	Stainless Steel	5" / 127mm	6" / 152mm
H-2697-6	3/4" NPT	7/8" / 16MM	Stainless Steel	6" / 152mm	7" / 178mm
H-2697-9	3/4" NPT	7/8" / 16MM	Stainless Steel	9" / 229mm	10" / 254mm
H-2697-8SS	3/4" NPT	7/8" / 16MM	Stainless Steel	8" / 203mm	9" / 229mm
H-2697-10SS	3/4" NPT	7/8" / 16MM	Stainless Steel	10" / 254mm	11" / 279mm
H-3833-8SS-1-1/16 STOR	1-1/16" STOR	5/8" / 19MM	Stainless Steel	8" / 203mm	9" / 229mm
H-3833-8SS-22MM	22mm	5/8" / 19MM	Stainless Steel	8" / 203mm	9" / 229mm
H-3833-9SS	3/4" NPT	5/8" / 19MM	Stainless Steel	9" / 229mm	10" / 254mm

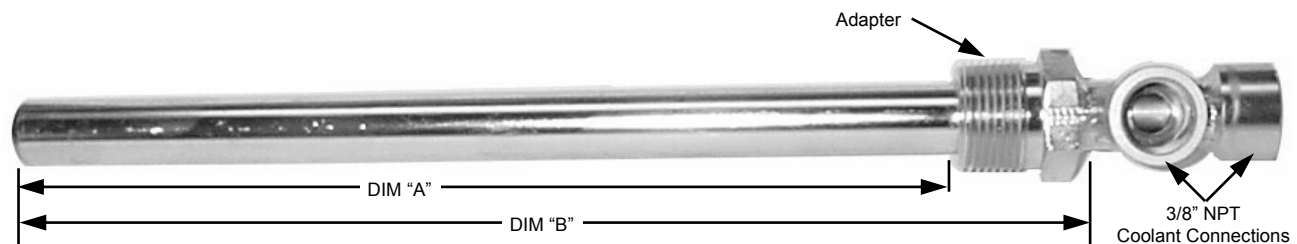

CUSTOM HEAT EXCHANGERS

- Review the following questions—
 - Exact dimensions and tank clearance (i.e. sketch, blueprint, IGES CAD file)? Tank and system capacity?
 - Type of vehicle or machine?
 - Type of fluid to be heated?
 - Maximum allowable temperature of fluid to be heated? Is thermostat required?
 - Total coolant capacity?
 - Does equipment have a fuel fired coolant pre-heater? What BTU size capacity?
 - Does application only require maintaining existing reservoir heat or will system be "cold soaked" and fluid temperature rise be required? Please note original fluid temperature and desired temperature after one hour of heating.
 - Is tank pressurized or used on aerial man lift?
- Fax or call Arctic Fox with above information
Phone: (800) 654-5382 or (763) 972-2758—Fax: (763) 972-2873
- Arctic Fox will design and quote for this specific reservoir.
- A design print and customer authorization will be sent to customer. If approved customer will indicate so by returning signed customer authorization form to Arctic Fox. After receipt of signed authorization, orders for the custom heat exchanger will be filled. Allow 4 to 6 weeks after receipt of signed authorization.


Example of Custom Heater with By-Pass Thermostat for Customer Specified Tank Configuration

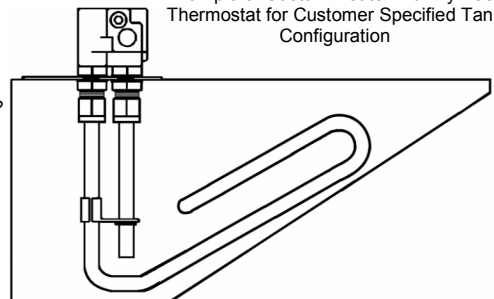

A-1714 Mounting Plate Bushing with O-Ring Seal


Used on applications where a reservoir is pressurized or when a heater is mounted below the fluid level. May be used instead of standard A-612 bushing to achieve seal under pressure.

ITEM	QTY.	DESCRIPTION	PART #
1	1	Hydraulic Bushing	A-1714
2		O-Ring kit—Package contains 4 White & 4 Black	A-617
3	1	O-Ring	A-1725
4	1	Compression Nut	A-639
5	1	Locking Nut	A-628
6	1	Copper Washer	A-616
7		Split Ring Ferrule—Package of 4	A-621

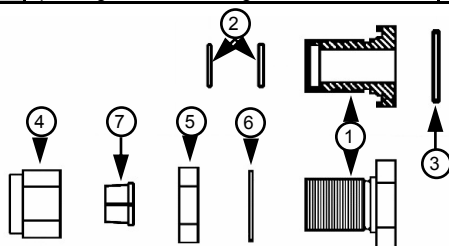

Fuel & Hydraulic Tank Weld-On Adapters

Part Number	Material	Cover Plate	Gasket	Mounting Bolt
A-626	Steel	A-414-0	A-611	A-610
A-818	Steel	A-819	A-801	A-610
A-800	Aluminum	A-802	A-801	A-610
A-820	Steel	A-822-0	A-821	A-610
A-823	Aluminum	A-824-0	A-821	A-610

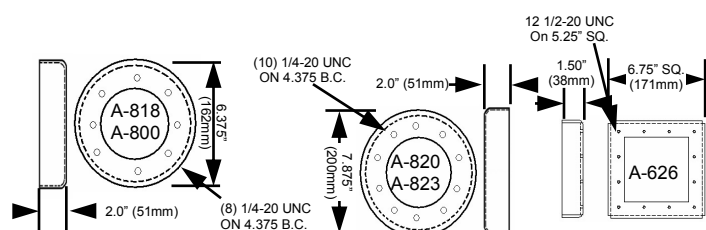


COOLANT CIRCULATION PUMP

Used to “boost” coolant flow in Arctic Fox™ Fuel & Fluid Temperature Management Systems, when multiple heat exchangers are installed or for remote tank installations that require long lengths of plumbing.

PART NUMBER	DESCRIPTION	AMP DRAW	RECOMMENDED TEMP RANGE	GPM/ LPM	PRESSURE PSI / BAR
A-1600-12V	12V DC Pump	8.5	to +20°F / -7°C	8 / 30	4 / .28
A-1600-24V	24V DC Pump	4.3	to +20°F / -7°C	8 / 30	4 / .28
A-1600-115V *	115V AC Pump	1.0	to +20°F / -7°C	8 / 30	4 / .28
A-4350-12V	12V DC Pump	10.1	to -40°F / -40°C	10 / 38	8 / .55
A-4350-24V	24V DC Pump	5.1	to -40°F / -40°C	10 / 38	8 / .55


* Dimensions shown do not pertain to the A-1600-115V

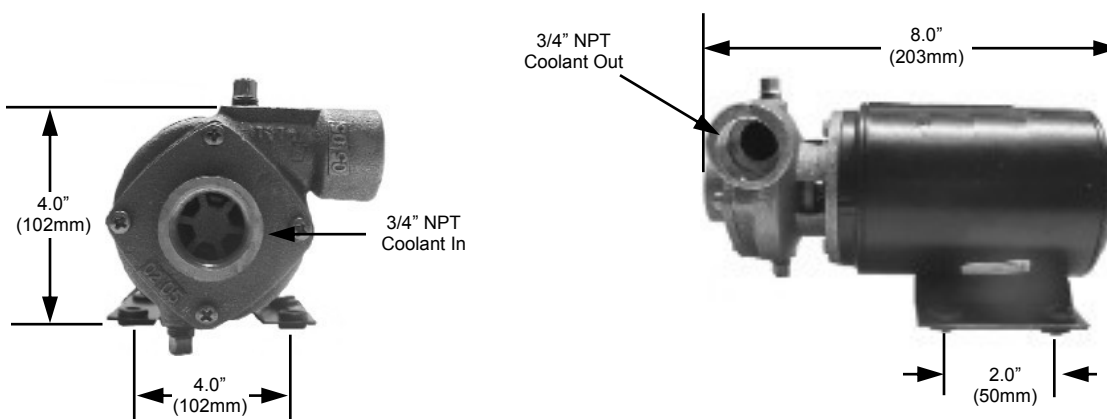

DC 12V & 24V RELAY & CONNECTOR BRACKET

Allows 12 and 24 volt DC pumps listed above to be operated with minimal current draw through a switch or other triggering mechanism.

PART NUMBER	DESCRIPTION
KT-1904	Relay & Connector Bracket for 12V DC System
KT-1941	Relay & Connector Bracket for 24V DC System
TERMINAL	CONNECTION
30	Battery + for negative ground systems Battery—for positive ground systems
85	Switch or triggering mechanism
86	Ground
87 (NO)	Brown pump wire on negative ground or insulated systems. Black pump wire for positive ground systems
87a (NC)	Normally closed contact—not used

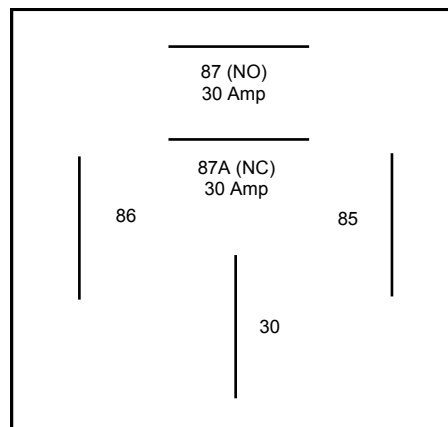

COOLANT MANIFOLDS

Used in Arctic Fox® Fuel & Fluid Temperature Management Systems to help distribution of coolant through multiple heat exchangers. May also be used to eliminate the use of multiple wye and tee fittings and to reduce the number of connections.


ST-1596—Dual Chamber, typically used on systems with up to a 50 thousand BTU coolant preheater.

Input Connections:

One 1" NPT inlet
One 1" NPT outlet
Three 1/2" NPT outlets.

Output Connections:

One 1" NPT inlet
Three 1/2" NPT inlets
One 1" NPT outlet.

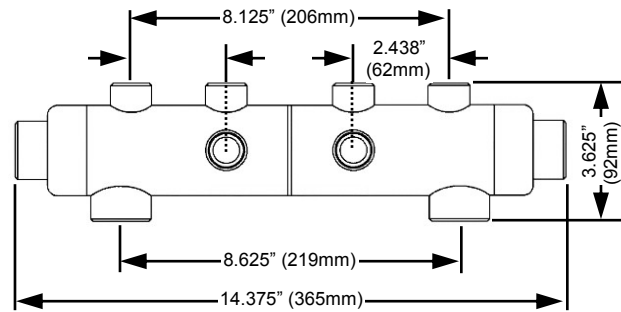


ST-1596SC—Dual Chamber, typically used on Scania vehicles.

Input Connections:

One 1/2" NPT inlet
Three 1/2" NPT outlets.

Output Connections:

Three 1/2" NPT inlets
One 1/2" NPT outlet.

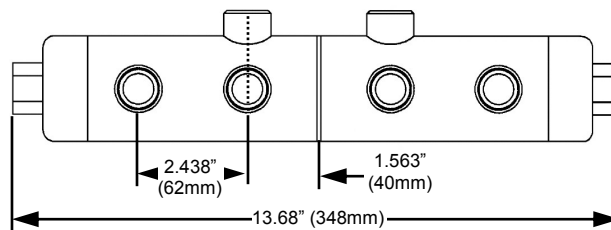


ST-2520—Dual chamber, typically used on systems with a 80—100 Thousand BTU coolant preheater.

Input Connections:

One 1/2" NPT Inlet
One 1" NPT outlet
Four 1/2" NPT outlets.

Output Connections:


One 1" NPT inlet
Four 1/2" NPT Inlets
One 1 1/2" NPT outlet.

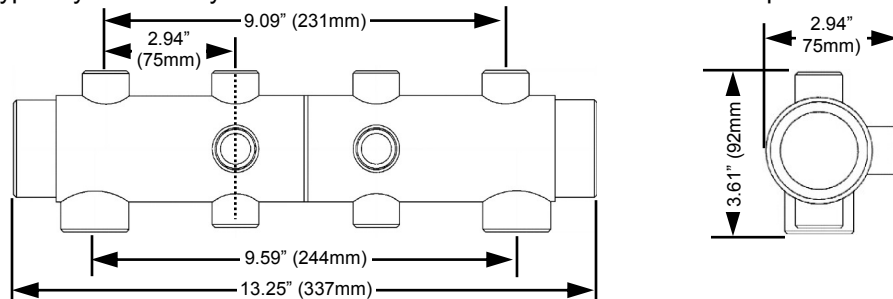

ST-2580—Single chamber, typically used in place of multiple Tee's .

Connections:

One 1 1/2" NPT
Two 1" NPT
Four 1/2" NPT ports.

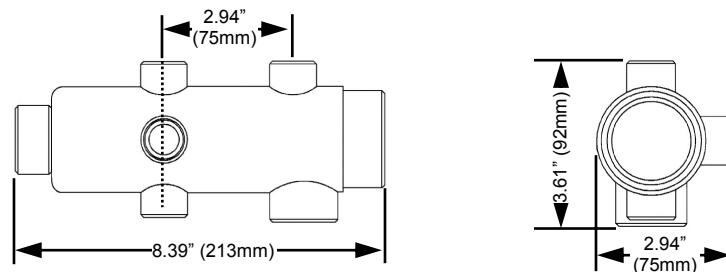


ST-5136—Dual Chamber, typically used on systems with a 80-100 Thousand BTU coolant preheater.

Input Connections:

One 1/2" NPT Inlet
Five 1" NPT outlets

Output Connections:

Five 1" NPT inlets
One 1 1/2" NPT outlet

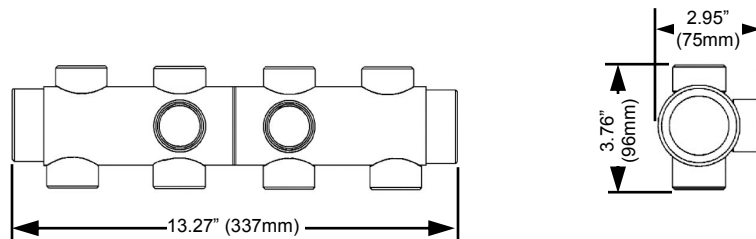


COOLANT MANIFOLDS

Used in Arctic Fox® Fuel & Fluid Temperature Management Systems to help distribution of coolant through multiple heat exchangers. May also be used to eliminate the use of multiple wye and tee fittings and to reduce the number of connections.


ST-5809—Single Chamber, typically used in place of multiple Tee's.

Connections:
One 1½" NPT,
Three 1" NPT
Two 1/2" NPT ports.

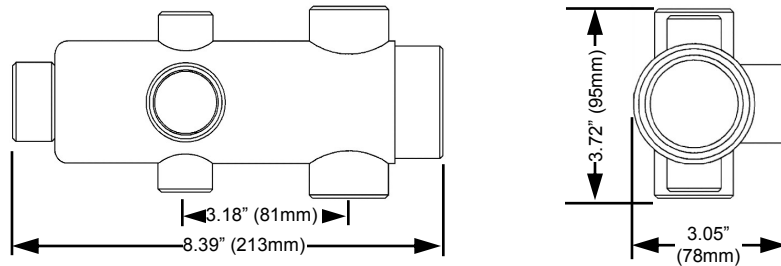


KT-5812—Used to mount ST-5809 manifold to 3500 series Caterpillar engines.

Kit Contents:
One Manifold Spacer Plate
Two M12 x 1.75 x50 Bolts
Two 1/2 x 13 x 2 Bolts
One 1/2 x 1.5 Bolt
Three 1/2 SAE Flat Washers
Three 1/2 SAE Spring Lock Washers
Two 1/2 UNC Nuts



A-5562—Single Chamber, vertical mount, typically used when multiple SF-5139 heat exchangers are used in parallel, or as an extension.

Connections:
One 1½" NPT inlet
Four 1" O.D Hose barb outlets
One 3/4 NPT outlet

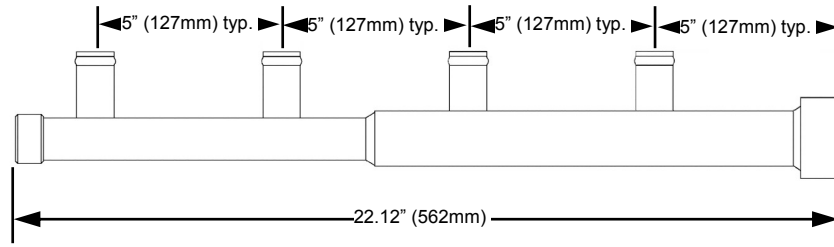

FUEL STANDPIPES—Dual & Single Draw

- Avoid costly road hazards, convert bottom draw to top draw
- Allows easy retrofitting to dual suction dual return
- Standpipe only or standpipe with return line provision
- Disperses hot return fuel within one or both tanks
- Complete systems available including tank standpipe units, fuel tee brackets, fittings and hose assemblies

Measure tank as shown. Model Number SP-1662 is a standpipe with Return Provision—specify curved or flat tank, refer to part number example and sizing chart to define the part number required for your application.

EXAMPLE: SP-1662-C-13 / Model # SP-1662 / C=Curved Tank—F=Flat Tank / 13=Tank depth from chart below


MEASURED OUTSIDE TANK DIMENSION	ORDER THIS TANK DEPTH	WHERE TO MEASURE TANK
13" - 13-7/8" (330mm—353mm)	13	
14" - 14-7/8" (356mm—379mm)	14	
15" - 15-7/8" (381mm—404mm)	15	
16" - 16-7/8" (406mm—429mm)	16	
17" - 17-7/8" (432mm—455mm)	17	
18" - 18-7/8" (457mm—480mm)	18	
19" - 19-7/8" (483mm—506mm)	19	
20" - 20-7/8" (508mm—531mm)	20	
21" - 21-7/8" (533mm—556mm)	21	
22" - 22-7/8" (559mm—582mm)	22	
23" - 23-7/8" (584mm—607mm)	23	
24" - 24-7/8" (610mm—633mm)	24	
25" - 25-7/8" (635mm—658mm)	25	
26" - 26-7/8" (660mm—683mm)	26	
27" - 27-7/8" (686mm—709mm)	27	
28" - 28-7/8" (711mm—734mm)	28	
29" - 29-7/8" (737mm—760mm)	29	
30" - 30-7/8" (762mm—785mm)	30	



TRANSMISSION MOUNTED DUAL TEE BRACKET ASSEMBLY

REF #	PART NUMBER	DESCRIPTION
1	A-1740 A-2834	Bracket kit includes reference numbers 1 through 8 Bracket with dual Tee & Shut-Off valves include reference numbers 1 through 8
2	A-1744	7/16" / 11mm UNC x 2" / 512mm long Grade 8 bolt (2)
3	A-1745	7/16" / 11mm Split Ring Lock Washer (2)
4	A-1746	7/16" / 11mm SAE Flat Washer (2)
5	A-1747	7/16" / 11mm I.D. x 1/4" / 6mm Thick Spacer (2)
6	A-1742	5/8" / 16mm UNC x 1-1/2" / 38mm Long Grade 8 Bolt (2)
7	A-1743	5/8" / 16mm Split Ring Lockwasher (2)
8	A-1648	5/8" / 16mm SAE Flat Washer (8)



CAUTION: It is extremely important suction and return hoses to left and right fuel tanks be identical in I.D., length and installation elevation.

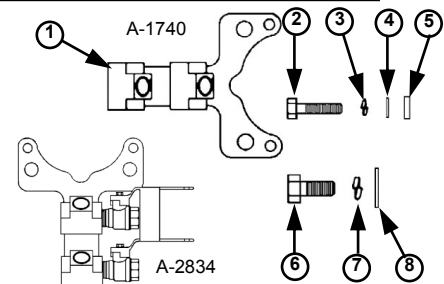

SINGLE DRAW STANDPIPE KIT

PART NUMBER SP-1069

A non-heated standpipe which can be used as a suction standpipe or as a return fuel provision. Fits any size tank up to 29" / 737mm, can be cut to required length by installer. This assembly bolts into a standard USA fuel gauge sending unit size opening if available. Kit includes template and hardware to easily make additional tank opening when required. For those systems that require special applications we'll design a standpipe with mounting hardware to supply diesel fuel to your fuel fired coolant or cab heater or refrigeration unit from your main fuel supply.



ITEM	QTY.	DESCRIPTION	PART #
1	5	#10-32 Allen head cap screw (Not Shown)	A-857
2	5	St. Steel Washer (Not Shown)	A-861
3	1	5/8" / 16mm x 1/2" NPT Elbow	A-609
4	2	Self-Drill-Tap Screw (Not Shown)	A-608
5	1	Standpipe Fitting	A-622B
6	1	Copper Washer	A-816
7	1	2.75" / 70mm O.D Standpipe Plate	A-1364
8	1	Gasket (Not Shown)	A-841
9	1	Backup Plate/Template (Not Shown)	A-834
10	1	Inverted Flare Gasket (Not Shown)	A-635
11	1	Standpipe 29"/737mm	A-624-29

COOLANT DAM® PRESSURE TESTER

DON'T DRAIN THE BLOCK FOR SIMPLE REPAIRS

- Changing Heater Hoses
- Changing Fan Sensors
- Changing Temperature Sensors
- Installing Shut-off Valves for:
Fuel Warmers & Separators
- Replacing Cab Heater Cores
- Replacing Heater Control Valves
- Eliminates Tedious Hand Pumping
- Provides Continuous Pressure for Diagnostics
- Plus Many Other Uses

Model T-1000

Kit Includes:
T-1000 Assembly
T-1025 Adapter
A-462-2 Extension Hose
A-536 Discharge Hose
A-483 Hanger
Storage Case

Covered by U.S. Patent No. 5,069,062
Canada Patent No. 2,026,852



HERE'S HOW

Using shop air, this ingenious, simple, new time-saving tool holds engine coolant inside the engine, with little or no coolant loss, even when pipe plugs, sensors, valves and other components are removed for replacement or repair.




First, the Coolant Dam® Pressure Tester creates a vacuum, holding coolant inside the engine. For many minor repairs there is no need to spend valuable shop time draining and refilling the cooling system.

The unit quickly converts from vacuum to a pressure tester, up to the maximum pressure limit of the included pressure cap so repairs can be tested without tedious hand pumping or running the engine.

The Coolant Dam® Pressure Tester attaches to the coolant filler neck, a standard size adapter is included, and many other adapters are available for specific applications.

Air Requirements for Continuous Operation: 30 CFM at 120-150 PSI (.85 Cubic Meters at 8-10 Bar)

SIMPLE TO USE

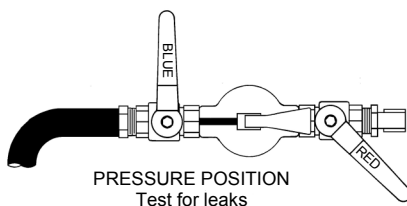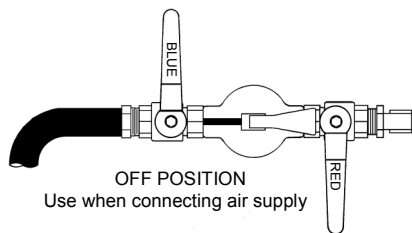

Install a male quick coupler fitting into the 1/4" NPT inlet port on the RED flow control valve. Attach the 3/4" / 19mm I.D. discharge hose to the exhaust port, barbed fitting on the blue valve. The Coolant Dam® is now ready for use.

TO RETAIN COOLANT IN THE ENGINE

1. Remove radiator cap.
2. Install Coolant Dam® on radiator neck using the appropriate adapter.
3. Route discharge hose into an open container to collect any minor amount of coolant expelled. **IMPORTANT: Secure hose to container or fixed object with the attached spring clip. Be sure the self-locking radiator cap provided is securely in place and locked onto the top of the Coolant Dam®.**
4. Close RED flow valve (position handle perpendicular to valve body)
5. Open BLUE flow control valve (position handle parallel to valve body)
6. Attach shop air hose to quick coupler on RED flow control valve. Slowly open the RED control valve until the maximum negative pressure reading is attained. You are now able to proceed with the repair. Once the repair is completed, close the RED flow control valve (position handle perpendicular to valve body).

TO PRESSURE TEST

1. Close both the RED and BLUE flow control valves (position handles perpendicular to valve body).
2. Slowly open the RED control valve until a positive pressure reading, equal to normal system pressure is attained.
3. Check for leaks.

NOTE: The instructions above are provided as general guidelines only. Before using the Coolant Dam®, please read the full instructions packaged with the product for additional operation instructions, cautionary and warning statements,

COOLANT DAM[®] ADAPTERS & PLUGS



T-1010
Mack Midliner
Fits vehicles using Mack
part number 5516031410
radiator cap.



T-1020
Volvo
Fits vehicles using Volvo
part number 1542591
radiator cap. (46x33mm
Thread).



T-1024
Truck "B" Size



T-1025
Standard Automotive Size
Reversible seal fits 1" or
3/4" deep filler necks. Also
fits late model Mercedes
1319.



T-1029
GMC-Freightliner-Western
Star
Threaded, Non-Vented,
Western Star cap part
number 20009-0002.



T-1030
Transit Bus Adapter
Fits many Flexible, Crown,
MCI, New Flyer, GM, MAN,
SABB filler necks.



T-1034
Pop Off Pressure Adapter
Mounts to top of Coolant
Dam[®] to test pop off
pressure of truck "B" size
cap.



T-1040
Volvo
Fits vehicles using Volvo
part number 6794968
radiator cap. (63 x 3mm
Thread).



T-1223
Volvo VN Series
Fits vehicles using Volvo
part number 1674922.



T-1228
Ford E-350
International 7.3L
Fits vehicles using Cap #
RS-103, F6DZ-8100A, 12R-
16#, or 31406.



T-1229
Kenworth Vehicles using
cap #
N5349001.



T-1230
Volvo VN Series
2006 and newer
Fits vehicles using Volvo
part number 20519046.



T-1233
Freightliner Columbia/
Cascadia
2008 & newer
Vehicles using cap #
N9685001 or BHTN9685001 or
BHTW3678001*

*Call for additional information
regarding cap #BHTW3678001.



T-3000
Navistar (1996 & Newer)
Fits vehicles using Navistar
part number 2039390C1
radiator cap.



T-3030X
Caterpillar Adapter
Call for information-Cat. #s
7N918, 7N5565, 6N1981,
1N3599.




T-3064
Freightliner Columbia
Fits vehicles using
Freightliner part number 05-
20763-000 radiator cap.

Rubber Expansion Plugs—Used to temporarily plug coolant lines during component replacement



A-440—3/8"	A-444—5/8"	A-448—7/8"	A-449 Kit (1 ea 3/8" to 7/8")
A-441—7/16"	A-445—11/16"	A-451—1"	
A-442—1/2"	A-446—3/4"	A-452—1-1/8"	A-467—Case
A-443—9/16"	A-447—13/16"	A-453—1-1/4"	

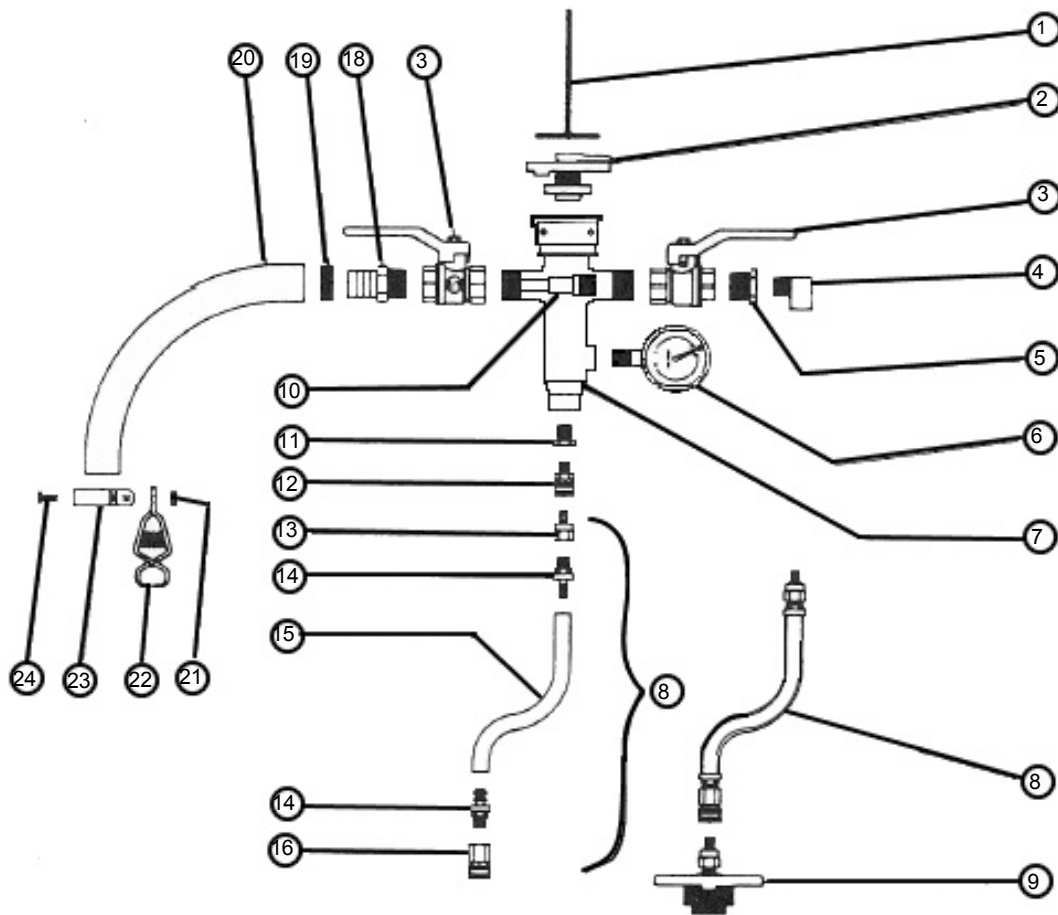

ADAPTER SERVICE PARTS

A-480—FEMALE COUPLER



A-482—MALE COUPLER




A-481—FEMALE NIPPLE



A-512—MALE NIPPLE



A-498—CAR RUBBER BUSHING

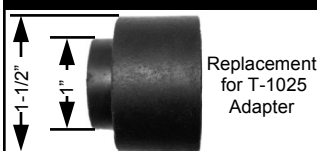


A-489—TRUCK RUBBER



Item	Qty.	Description	Part #
1	1	Hanger Wire	A-483
2	1	Radiator Cap-Locking, 13 Pound	A-463
	1	Radiator Cap-Locking, 20 Pound	A-6336
3	1	1/2" Ball Valve (Blue Handle)	A-461-B
	1	1/2" Ball Valve (Red Handle)	A-461-R
4	1	1/4" 90 Degree Street Elbow	A-242
5	1	1/2" x 1/4" Steel Pipe Bushing	A-470
6	1	Pressure / Vacuum Gauge	A-460
7	1	COOLANT DAM Pressure Tester Housing	A-450
8	1	1/4" Extension hose (Includes 13, 14, 15, 16)	A-462-2
9	1	Head Kit	T-1025
10	1	Nozzle	A-477
11	1	1/4" x 1/8" Steel Pipe Bushing	A-472
12	1	1/8" BST Male Coupler	A-482
13	2	1/8" BST Female Nipple	A-481
14	2	1/4" x 1/8" Push on Hose End	A-462-3
15	1	1/2" O.D. x 14" (356mm) Long Hose	A-462-4
16	1	1/8" BST Female Coupler	A-480
18	1	3/4" Hose barb to 1/2" Male Pipe	A-652
19	1	Uni-Clamp	A-476
20	1	3/4" I.D. x 7' (2m) Long Discharge Hose	A-536
21	1	#8-32 KEPS Shake proof Nut	A-486
22	1	Spring Clip	A-485
23	1	Hose Band	A-484
24	1	#8-32 x 1/2" (13mm) Long Machine Screw	A-487

FUEL & COOLANT LINE INSULATION & HOSE

- Prevent fuel from cooling off before reaching the engine
- Add to the efficiency of Arctic Fox® fuel warmers
- Help prevent hose chafing
- Improve performance of preheaters by maintaining heat in the system
- Effectively insulate cross-over lines
- Use in temperatures ranging from
–40° F/C to + 220°F / 104°C
- 1/2" (13mm) wall thickness for easy installation

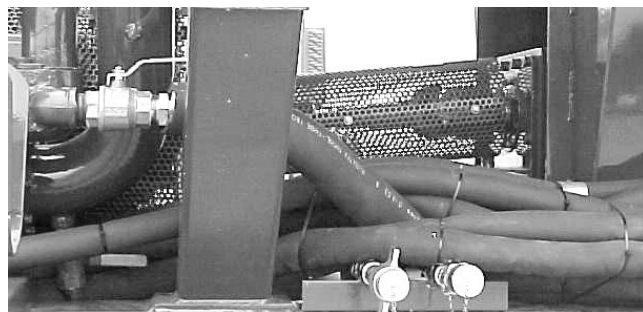

Arctic Fox insulube is the perfect companion product for Arctic Fox® fuel and fluid warmers. While the fuel heater keeps your fuel warm and prevents gelling or waxing, insulube insulates the fuel and coolant line to help maintain the optimum temperature. Protect that critical area between the fuel tank and engine with Arctic Fox insulube.

INSULTUBE		
PART NUMBER	INSULTUBE I.D.	NOMINAL LENGTH
A-1710	1/2" / 13mm	6 feet / 2 meters
A-1711	5/8" / 16mm	6 feet / 2 meters
A-1712	3/4" / 19mm	6 feet / 2 meters
A-706	1-1/8" / 32mm	6 feet / 2 meters
A-720	1-1/8" / 32mm	125' Roll or 25' Increments
A-705	1-1/8" / 32mm	4 Pieces 6' each / 2 meters w/ tie straps
A-712	1-3/8" / 35mm	6 feet / 2 meters
A-721	1-3/8" / 35mm	125' Roll or 25' Increments
A-713	2-1/8" / 54mm	6 feet / 2 meters
A-1791	2-1/2" / 64mm	6 feet / 2 meters
A-714	3" / 76mm	6 feet / 2 meters

INSUL LOCK		
A-1789	7/8" / 22mm Split/Self Sealing	6 feet / 2 meters

INSTALLATION AIDS		
A-707	Weather Resistant Tie Strap	14" / 356MM
A-711	Heavy Duty Weather Resistant Tie Strap	14" / 356MM
A-1790	Glue to Join Insultube Ends	1/2 Pint / 0.24 Liter

SAE 100R5 Hose Single wire braid—sold by the foot

PART NUMBER	HOSE SIZE	HOSE I.D.
A-1750-4	#4	0.19" / 4.8mm
A-1750-5	#5	0.25" / 6.4mm
A-1750-6	#6	0.31" / 8mm
A-1750-8	#8	0.41" / 10.4mm
A-1750-10	#10	0.50" / 12.7mm
A-1750-12	#12	0.62" / 15.7mm

PUSH-LOK Hose Sold by the foot		
A-2766		1/4" / 6.35mm
A-1660		3/8" / 9.53mm

COOLANT HOSE				
PART NUMBER	HOSE I.D.	QUANTITY	MATERIAL	NOTES
A-468	5/8" / 16mm	Bulk (1)	Rubber ILO Silicone	
A-532	5/8" / 16mm	Bulk (1)	Insulated Silicone	Includes A-720 Insultube
A-525	5/8" / 16mm	Bulk (1)	Silicone	
A-2181	5/8" / 16mm	1 Each	Rubber ILO Silicone	90 Degree
A-531	3/4" / 19mm	Bulk (1)	Rubber ILO Silicone	
A-530	3/4" / 19mm	Bulk (1)	Silicone	
A-534	3/4" / 19mm	Bulk (1)	Insulated Silicone	Includes A-721 Insultube
A-3265	3/4" / 19mm	Bulk (1)	Rubber ILO Silicone	Extra Heavy Duty
A-4306	3/4" / 19mm	Bulk (1)		Green Stripe #2
A-3231	1" / 25mm	Bulk (1)	Silicone	
A-5011	1" / 25mm	Bulk (1)	Rubber	
A-3266	1" / 25mm	Bulk (1)	Rubber ILO Silicone	Extra Heavy Duty
A-3985	1-1/4" / 32mm	Bulk (1)	Silicone	
A-3628	1-1/4" / 32mm	Bulk (1)	Rubber ILO Silicone	Extra Heavy Duty
A-3252	1-1/2" / 38mm	3' / 914mm	Rubber ILO Silicone	
A-3254	1-1/2" / 38mm	1 Each	Rubber ILO Silicone	90 Degree
A-3986	1-1/2" - 38mm	3' / 914mm	Silicone	

(1) All bulk hose sold in increments of 25 feet / 7.62 meters only

HOSE CLAMPS		EFFECTIVE DIAMETER		
PART NUMBER	SIZE	MIN.	MAX.	STYLE
A-2020	4	7/32" / 5.6mm	5/8" / 15.8mm	Standard
A-1658	6	7/16" / 11.1mm	25/32" / 19.8mm	Standard
A-520	10	9/16" / 14.3mm	1-1/16" / 26.9mm	Shielded
A-2869	10	9/16" / 14.3mm	1-1/16" / 26.9mm	Constant Torque
A-279	12	11/16" / 17.5mm	1-1/4" / 31.7mm	Shielded
A-3950	12	11/16" / 17.5mm	1-1/4" / 31.7mm	Constant Torque
A-3267-16	16	13/16" / 20.6mm	1-1/2" / 38.1mm	Shielded
A-3950-16	16	13/16" / 20.65mm	1-1/2" / 38.1mm	Constant Torque
A-3267-20	20	15/16" / 23.8mm	1-3/4" / 44.4mm	Shielded
A-3950-20	20	15/16" / 23.8mm	1-3/4" / 44.4mm	Constant Torque
A-3267-24	24	1-1/16" / 26.9mm	2" / 50.8mm	Shielded
A-3950-24	24	1-1/16" / 26.9mm	2" / 50.8mm	Constant Torque
A-3253	28	1-15/16" / 33.3mm	2-1/4" / 57.1mm	Shielded
A-3950-28	28	1-15/16" / 33.3mm	2-1/4" / 57.1mm	Constant Torque

NOTE: Use **ONLY** shielded or constant torque clamps on silicone hose

FITTINGS & VALVES

REUSEABLE SWIVEL FITTING For SAE 100R5 Hose				
PART NUMBER	HOSE SIZE	THREAD	TUBE SIZE	SEAT
A-1752-4	#4	7/16"-20	1/4"	Dual
A-1752-5	#5	1/2"-20	5/16"	Dual
A-1753-6	#6	9/16"-18	3/8"	JIC 37°
A-1752-6	#6	5/8"-18	3/8"	SAE 45°
A-1752-8	#8	3/4"-16	1/2"	Dual
A-1752-10	#10	7/8"-14	5/8"	Dual
A-1753-12	#12	1-1/6"-12	3/4"	JIC 37°
A-1752-12	#12	1-1/6"-14	3/4"	SAE 45°

HOSE BARB 90° ELBOW TO MALE PIPE			
PART NUMBER	I.D. HOSE SIZE	NPT THREAD	MATERIAL
A-661	3/8" / 10mm	1/8"	Brass
A-2061	3/8" / 10mm	3/8"	Brass
A-519	5/8" / 16mm	3/8"	Brass
A-631	5/8" / 16mm	1/2"	Brass
A-653	3/4" / 19mm	1/2"	Brass
A-4221-x-x	Call for Size/Availability		Steel

HOSE BARB 45° ELBOW TO MALE PIPE			
PART NUMBER	I.D. HOSE SIZE	NPT THREAD	MATERIAL
A-656	5/8" / 16mm	3/8"	Brass
A-657	5/8" / 16mm	1/2"	Brass
A-658	3/4" / 19mm	1/2"	Brass
A-4220-x-x	Call for Size/Availability		Steel

HOSE BARB STRAIGHT TO MALE PIPE			
PART NUMBER	I.D. HOSE SIZE	NPT THREAD	MATERIAL
A-2154	1/8" / 3mm	1/8"	Brass
A-2155	3/16" / 5mm	1/8"	Brass
A-2058	1/4" / 6mm	1/8"	Brass
A-1724	5/16" / 8mm	1/4"	Brass
A-1707	3/8" / 10mm	3/8"	Brass
A-1681	5/8" / 16mm	3/8"	Brass
A-518	5/8" / 16mm	3/8"	Brass
A-1708	1/4" / 6mm	3/8"	Brass
A-516	3/4" / 19mm	3/8"	Brass
A-1706	3/8" / 10mm	1/2"	Brass
A-630	5/8" / 16mm	1/2"	Brass
A-652	3/4" / 19mm	1/2"	Brass
A-2081	5/8" / 16mm	3/4"	Brass
A-654	3/4" / 19mm	3/4"	Brass
A-3275	1" / 25mm	3/4"	Steel
A-4389	1" / 25mm	3/4"	Brass/Steel
A-3005	1" / 25mm	1"	Brass
A-3269	1" / 25mm	1"	Steel
A-3629	1-1/4" / 32mm	1"	Steel
A-3270	1-1/4" / 32mm	1-1/4"	Steel
A-3255	1-1/2" / 38mm	1-1/2"	Steel
A-3271	1-1/2" / 38mm	1-1/2"	Steel
A-4423-X-X	Call for Size/Availability		Steel


COUNTERSUNK HEX HEAD PLUG		
PART NUMBER	PIPE SIZE	MATERIAL
A-558	1/8"	Brass
A-1601	1/4"	Brass
A-294	3/8"	Brass
A-413	3/8"	Brass
A-295	1/2"	Brass
A-296	3/4"	Brass
A-2137	1"	Steel


ADAPTERS			
PART NUMBER	THREAD #1	THREAD #2	MATERIAL
A-662	1/8" NPT	1/8" NPT	Brass
A-265	1/4" NPT	1/4" NPT	Brass
A-266	3/8" NPT	3/8" NPT	Brass
A-3775	1/2" NPT	1/4" NPT	Steel
A-277	1/2" NPT	3/8" NPT	Brass
A-267	1/2" NPT	1/2" NPT	Brass
A-2102	3/4" NPT	1/2" NPT	Brass
A-2195	1/2" NPT	3/4"-16UNF	Steel Cat 3116

PIPE PLUGS				
PART NUMBER	OLD NUMBER	PIPE SIZE	STYLE	MATERIAL
A-565		1/8"	Square Head	Brass
A-3069		1/8"	Hex	Brass
A-3776		1/8"	Petcock	Brass
A-4604		1/4"	Hex	Steel
A-1741		3/8"	Hex	Brass
A-1762	A-522	1/2"	Hex	Brass
RM-1690		1/2"	Hex	Steel
A-398	A-339	3/4"	Hex	Brass
A-3939		3/4"	Hex	Stainless Steel


PIPE NIPPLES				
PART NUMBER	NPT THREAD	MATERIAL	STYLE	LENGTH
A-490	1/8"	Brass	Standard	1.50" / 38mm
A-270	1/4"	Brass	Hex	Close
A-271	3/8"	Brass	Hex	Close
A-1640	3/8"	Brass	Standard	2.0" / 50.8mm
A-272	1/2"	Brass	Hex	Close
A-2456	1/2"	Stainless Steel	Standard	2.0" / 50.8mm
A-2761	1/2"	Steel	Hex	3.0" / 76.2mm
A-2703	3/4"	Brass	Hex	2.0" / 50.8mm
A-3638	3/4"	Steel	Standard	6.0" / 152.4mm
A-2893	1"	Steel	Standard	3.0" / 76.2mm
A-3697	1-1/2"	Steel	Standard	Close
A-4321	1-1/2"	Steel	Standard	Close schedule. 40
A-3226	2"	Stainless Steel	Standard	Close


FITTINGS & VALVES—CONTINUED


90° UNION ELBOW 		
PART NUMBER	NPT THREAD	MATERIAL
A-1641	3/8"	Brass
A-3262	1-1/2"	Black Iron


90° STREET ELBOW 		
PART NUMBER	NPT THREAD	MATERIAL
A-1372	1/8"	Brass
A-242	1/4"	Brass
A-243	3/8"	Brass
A-244	1/2"	Brass
A-4324	3/4"	Steel
A-2163	1"	Steel
A-3276	1"	Black Iron
A-3740	1-1/4"	Black Iron
A-3247	1-1/2"	Black Iron


45° STREET ELBOW 		
PART NUMBER	NPT THREAD	MATERIAL
A-255	1/4"	Brass
A-256	3/8"	Brass
A-257	1/2"	Brass
A-4605	3/4"	Steel
A-3277	1"	Black Iron
A-3741	1-1/4"	Black Iron
A-3248	1-1/2"	Black Iron


45° ELBOW—BRASS 				
PART NUMBER	HOSE SIZE	TUBE SIZE	NPT THREAD	STRAIGHT THREAD
A-1770	#4	1/4"	1/2"	7/16" x 20
A-1771	#5	5/16"	1/2"	1/2" x 20
A-1772	#6	3/8"	1/2"	5/8" x 18
A-261	Replaced by part number A-292			
A-291	#8	1/2"	1/2"	3/4" x 16
A-260	#10	5/8"	3/8"	7/8" x 14
A-292	#10	5/8"	1/2"	7/8" x 14
A-293	#12	3/4"	1/2"	1-1/16" x 14


PIPE THREAD WYE 		
PART NUMBER	NPT THREAD	MATERIAL
A-297	1/2"	Brass
A-298	3/4"	Brass


BEADED WYE—STEEL (won't crack like plastic) 				
PART NUMBER	DIM A	DIM B	DIM C	
A-2325	3/4"	7/8"	7/8"	
A-2326	5/8"	7/8"	7/8"	
A-457	5/8"	5/8"	5/8"	
A-459	3/4"	3/4"	3/4"	


STREET TEE 		
PART NUMBER	NPT THREAD	MATERIAL
A-4323	3/8"	Steel
A-284	1/2"	Steel
A-338	3/4"	Steel


PIPE THREAD TEE 			
PART NUMBER	NPT THREAD	MATERIAL	STYLE
A-3639	1/8"	Brass	Standard
A-4322	3/8"	Steel	Male Branch
A-289	1/2"	Steel	Standard
A-2709	3/4"		Male Branch
A-3755	3/4" X 3/4" X 1/2"	Stainless Steel	Reducer
A-3285	1"	Black Iron	Standard
A-3796	1" X 1" X 1/2"	Stainless Steel	Reducer
A-4422	1-1/2" X 1-1/2" X 3/4"	Black Iron	Reducer


BEADED TEE—STEEL (won't crack like plastic) 			
PART NUMBER	DIM A	DIM B	DIM C
A-2321	5/8"	5/8"	5/8"
A-2323	5/8"	7/8"	7/8"
A-3600	3/4"	3/4"	3/4"
A-2322	3/4"	7/8"	7/8"
A-2324	3/4"	1-1/8"	1-1/8"

BUSHING 			
PART NUMBER	NPT 1	NPT 2	Material
A-472	1/4"	1/8"	Steel
A-32789	3/8"	1/8"	Brass
A-3287	1/2"	1/8"	Brass
A-4598	1/2"	1/8"	Steel
A-1373	1/2"	1/4"	Brass
A-470	1/2"	1/4"	Steel
A-521	1/2"	3/8"	Brass
A-377	3/4"	3/8"	Brass
A-282	3/4"	1/2"	Brass
A-2708	1"	1/2"	Brass
A-2712	1"	3/4"	Brass
A-3272	1-1/2"	1"	Steel
A-3249	1-1/2"	1-1/4"	Steel

37° JIC—STEEL MALE CONNECTOR 				
PART NUMBER	HOSE SIZE	TUBE SIZE	NPT THREAD	STRAIGHT THREAD
A-2027	#8	1/2"	1/2"	3/4"-16
A-2182	#12	3/4"	1/2"	1-1/16"-12
A-2103	#16	1"	3/4"	1-5/16"-12

45° ELBOW, MALE—STEEL (37° JIC) 				
PART NUMBER	HOSE SIZE	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD
A-2028	#8	1/2"	1/2"	3/4" - 16"

90° ELBOW, MALE—STEEL (37° JIC) 				
PART NUMBER	HOSE SIZE	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD
A-2029	#6	3/8"	1/2"	9/16" -18"

90° ELBOW, MALE, STRAIGHT THREAD STEEL (37° JIC) 				
PART NUMBER	HOSE SIZE	TUBE SIZE	STRAIGHT THREAD-1	PORT THREAD-2
A-2026	#8	1/2"	3/4" - 16"	3/4" - 16"


FITTINGS & VALVES—CONTINUED

STEEL UNION TEE (37° JIC) WITH BULKHEAD JAM NUT




PART NUMBER	HOSE SIZE	TUBE SIZE	STRAIGHT THREAD
A-1759	#8	1/2"	3/4" - 16"
A-1760	#10	5/8"	7/8" - 14"

UNION ELBOW—MALE 90° BRASS




PART NUMBER	HOSE SIZE 1 - 2	TUBE SIZE 1 - 2	STRAIGHT THREAD 1 - 2
A-1739	#10 #8	5/8" 1/2"	7/8" - 14" - 3/4" - 16"
A-809	#10 #10	5/8" 5/8"	7/8" - 14" - 7/8" - 14"

UNION—MALE BRASS




PART NUMBER	HOSE SIZE	TUBE SIZE	STRAIGHT THREAD
A-1734	#4	1/4"	7/16" - 20"
A-1775	#5	5/16"	1/2" - 20"
A-1776	#6	3/8"	5/8" - 18"
A-1777	#8	1/2"	3/4" - 16"
A-1778	#10	5/8"	7/8" - 14"
A-1779	#12	3/4"	1-1/16" - 14"

FEMALE ELBOW—90° - BRASS




PART NUMBER	HOSE SIZE	TUBE SIZE	STRAIGHT THREAD
A-609	#10	1/2"	7/8" - 14"

BALL VALVE



PART NUMBER	NPT THREAD 1	NPT THREAD 2	NOTES
A-375	3/8"	3/8"	Vented
A-461	1/2"	1/2"	
A-2838	1/2"	1/2"	Male / Female
A-3696-12	3/4"	3/4"	
A-3696-16	1"	1"	
A-3696-20	1-1/4"	1-1/4"	
A-3696-24	1-1/2"	1-1/2"	

TRUCK VALVE—BRASS




PART NUMBER	I.D. HOSE SIZE 1	I.D. THREAD SIZE 1	THREAD SIZE 2	HANDLE
A-526	5/8" / 16mm	N/A	3/8" NPT	Tee
A-527	5/8" / 16mm	N/A	3/8" NPT	Round
A-276	5/8" / 16mm	N/A	1/2" NPT	Round
A-275	3/4" / 19mm	N/A	1/2" NPT	Round
A-529	#10	7/8" - 14"	1/2" NPT	Round

STEEL ADAPTER W / ORING



PART NUMBER	THREAD 1	THREAD 2
A-280	7/8" - 14" UNF	1/2" NPT
A-2701	1-1/6" - 12" UNF	3/4" NPT
A-2702	1-3/16" - 12" UNF	3/4" NPT

SWIVEL CONNECTOR STEEL (37° JIC)



PART NUMBER	HOSE SIZE	TUBE SIZE	STRAIGHT THREAD 1	PIPE THREAD 2
A-2191	#6	3/8"	9/16" - 18"	1/2"
A-2192	#8	1/2"	3/4" - 16"	1/2"
A-2193	#10	5/8"	7/8" - 14"	1/2"
A-2194	#12	3/4"	1-1/16" - 12"	3/4"

COUPLING



PART NUMBER	PIPE THREAD	MATERIAL	STYLE
A-3227	1/8"	BRASS	STANDARD
A-250	1/4"	BRASS	HEX
A-251	3/8"	BRASS	HEX
A-252	1/2"	BRASS	HEX
A-3286	3/4"	STEEL	STANDARD
A-2101	3/4" X 1/2"	STEEL	HEX
A-3670	1"	STEEL	STANDARD
A-3695	1-1/4"	STEEL	STANDARD
A-3623	1-1/2"	STEEL	STANDARD
A-3228	2"	STEEL	STANDARD

HALF COUPLING



PART NUMBER	THREAD	MATERIAL	STYLE
A-3246	1/8" NPT	St. STEEL	STANDARD
A-2055	1/4" NPT	STEEL	STANDARD
A-3712	3/8" NPT	STEEL	STANDARD
A-302	3/8" NPT	St. STEEL	STANDARD
A-2054	1/2" NPT	STEEL	STANDARD
A-304	1/2" NPT	St. STEEL	STANDARD
A-306	1/2" NPT	St. STEEL	HEX
A-306-1	1/2" NPT	St. STEEL	MODIFIED HEX
A-1754	3/4" - 16"	St. STEEL	STANDARD
A-334	3/4" NPT	St. STEEL	STANDARD
A-1355	1" NPT	St. STEEL	STANDARD
A-2867	1-1/2" NPT	St. STEEL	STANDARD

MALE ELBOW 90° - BRASS



PART NUMBER	HOSE SIZE	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	NOTE
A-1733	#4	1/4"	1/2"	7/16" - 20"	
A-1773	#5	5/16"	1/2"	1/2" - 20"	
A-1774	#6	3/8"	1/2"	5/8" - 18"	OLD PART# A-1374
A-281	#8	1/2"	1/2"	3/4" - 16"	
A-1371	#8	1/2"	1/2"	3/4" - 16"	Extruded
A-283	#10	5/8"	1/2"	7/8" - 14"	
A-290	#12	3/4"	1/2"	1-1/16" - 14"	

SAE 45° FLARED FITTINGS



PART NUMBER	HOSE SIZE	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD
A-1732	#4	1/4"	1/2"	7/16" - 20"
A-1768	#5	5/16"	1/2"	1/2" - 20"
A-1769	#6	3/8"	1/2"	5/8" - 18"
A-1639	#8	1/2"	3/8"	3/4" - 16"
A-287	#8	1/2"	1/2"	3/4" - 16"
A-285	#10	5/8"	1/2"	7/8" - 14"
A-278	#12	3/4"	1/2"	1-1/16" - 14"

FLARED SEAL PLUG—BRASS



PART NUMBER	HOSE SIZE	TUBE SIZE	STRAIGHT THREAD
A-249	#10	5/8"	7/8" - 14"

CAP NUT—BRASS



PART NUMBER	HOSE SIZE	TUBE SIZE	STRAIGHT THREAD
A-258	#10	5/8"	7/8" - 14"

FITTINGS & VALVES—CONTINUED



HOSE MENDER		
PART NUMBER	HOSE I.D.	
A-3955	5/8" / 16mm	
A-2860	3/4" / 19mm	

THREE - WAY VALVE			
PART NUMBER	PIPE THREAD	FLOW DIAMETER	
A-2744	1/4"	0.281" / 7.13mm	

PUSH-LOK MALE CONNECTOR—BRASS			
PART NUMBER	PIPE THREAD	HOSE I.D.	
A-462-3	1/8"	1/4"	
A-1644	1/8"	3/8"	
A-1643	3/8"	1/4"	
A-1638	3/8"	3/8"	

PUSH-LOK 90° ELBOW			
PART NUMBER	PIPE THREAD	HOSE I.D.	
A-1637	3/8"	3/8"	
A-3264	1/2"	3/8"	

14mm BANJO ADAPTERS

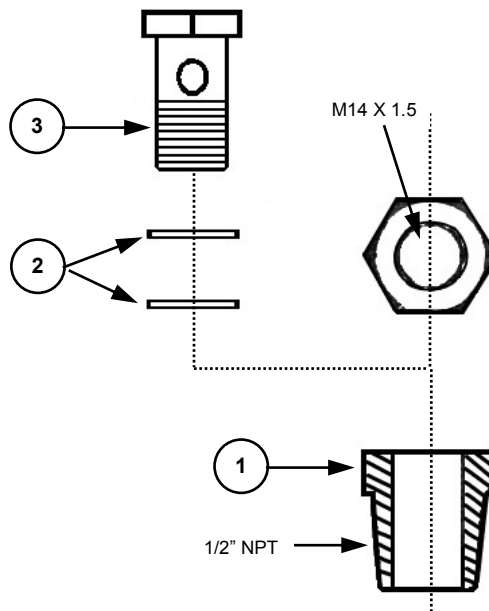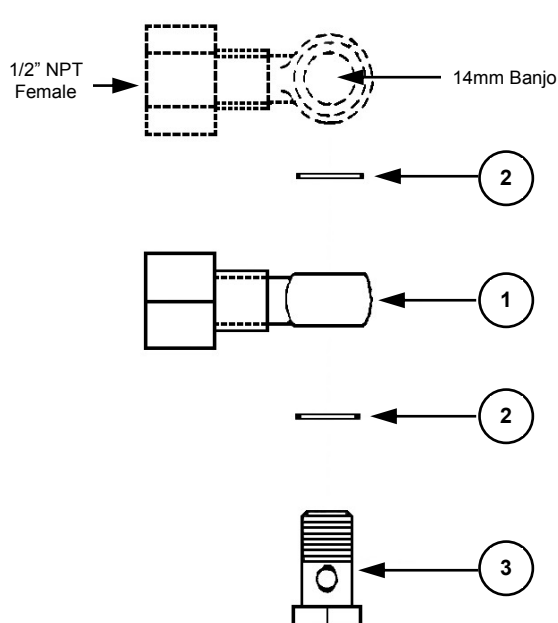

KT-1914—14mm Female Banjo Adapter Kit			
ITEM	QTY.	DESCRIPTION	PART NO.
1	1	14mm Female Banjo Adapter	A-1654
2	2	Copper Joint Ring	A-1682
3	1	14mm Hollow Screw	A-1694

KT-1915—14mm Male Banjo Adapter Kit			
ITEM	QTY.	DESCRIPTION	PART NO.
1	1	14mm Male Banjo Adapter	A-1690
2	2	Copper Joint Ring	A-1682
3	1	14mm Hollow Screw	A-1694

LITERATURE AND SALES AIDS

PRODUCT INFORMATION BROCHURES

BROCHURE NUMBER	DESCRIPTION
B-420	By-Pass Thermostat Fuel Warmers
B-439	Coolant Dam® Pressure Tester
B-442	Coolant Dam® Pressure Tester Adapter Flyer
B-446	In-Line Fuel Warmer Heat Rise Data
B-449	Shut-Off Thermostat
B-457	Custom Hydraulic Fluid Warmers
B-475	Hot Fox™ Fuel Warmer Heat Rise Data
B-484	Thermal Liner® 15 Fluid Warmer
B-487	Fuel and Fluid Temperature Management System
B-489	In-Line Fuel Warmers
B-490	Non-Heated Fuel Tank Standpipe
B-492	Dual Draw / Dual Return System
B-500	Product Catalog
B-514	Capabilities Brochure
B-518	Insultube / Hose
B-521	Battery Heater
B-526	Electric Reservoir Heater
B-555	Tees and Wyes
B-569	Tube Fabrication
B-583	Hotline™ Electric In-Line Fuel Warmer
B-600	Hydra Liner
B-605	Lectro Liner
B-639	Alternative Fuel Heater
B-700	In-Line Fuel Warmers—Biodiesel Compatible (B100)
INSTALLATION BROCHURE NUMBER	DESCRIPTION
B-103	In-Tank Fuel Warmer—Non-Thermostat
B-104	In-Tank with By-Pass Thermostat
B-445	In-Line Fuel Warmer
B-458	Hot Fox™ Fuel Warmer
B-463	Hot Fox™ Fuel Warmer Adapter
B-481	Shut-Off Thermostat
B-511	Hot Fox™ Fuel Warmer with Auxiliary Standpipe
B-597	HotLine™ Operators Manual

RETURN GOODS POLICY—OVERSTOCK

Authorization must be obtained prior to any merchandise being returned. On an annual basis, up to 10% of the previous 12 months purchases may be returned for credit toward future orders, transportation charges prepaid. A 20% restocking charge will be assessed on all such transactions. All product must be in the original carton and be accompanied by reasonable proof of purchase.

MANUFACTURER'S RIGHTS RETAINED

Arctic Fox reserves the right to make changes in design or to make additions to or improvements upon any of its products at any time without incurring any obligation whatsoever to install the same or improve upon products previously manufactured.

WARRANTY AND RETURNS—DOMESTIC SALES ONLY

FUEL AND FLUID WARMER WARRANTY (COOLANT)

All Arctic Fox® warmers (other than engine oil pan heat exchangers and alternative fuel heat exchangers) using coolant are warranted against defects in materials and workmanship for a period of 5-years or 600,000 miles from the date of purchase by the user. This warranty does not cover warmers which are altered or used for a purpose other than that for which it was intended or used in a manner inconsistent with any instructions regarding its use. The exclusive remedy for any unit found to be defective under this warranty is limited to the repair or replacement of the defective unit without charge, and Arctic Fox® shall **NOT** be liable for any consequential or incidental damages, including labor.

ELECTRICAL COMPONENTS WARRANTY

HOTLINE®, ELECTRIC RESERVOIR WARMERS AND CAL RODS

All Arctic Fox® Electrical components are warranted for one year from date of sale to the original consumer against defects in workmanship and materials. The manufacturer's only obligation shall be to repair or replace at the manufacturer's option the product provided it is returned transportation prepaid to the factory within one year from date of sale to original consumer. Defects or failures due to incorrect installation, improper voltage, improper usage or handling, or by any other conditions beyond our control, as to any and all of which the manufacturer will be sole judge, are specifically excluded from this warranty. This warranty gives you specific legal rights. You may also have implied warranty rights which vary from state to state, or province to province, depending upon the location of your residence. No other liability of any kind, arising from the use of the product, whether defective or not, is assumed.

NON-HEATED STANDPIPE WARRANTY

All Arctic Fox® non-heated standpipes are warranted against defects in workmanship for a period of 5 years or 600,000 miles from the date of purchase by user. Tank flange mounting gaskets and installation accessories are warranted against defects for a period of 90 days. This warranty does not cover standpipes which are altered, installed or used in a manner inconsistent with any Arctic Fox® instructions regarding use or installation. The exclusive remedy for any unit found to be defective under this warranty is limited to the repair or replacement of the defective unit without charge, and Arctic Fox® shall **NOT** be liable for any consequential or incidental damages, including labor charges.

COOLANT DAM® PRESSURE TESTER WARRANTY

The Arctic Fox® COOLANT DAM® PRESSURE TESTER is warranted against defects in materials and workmanship for a period of one year from date of purchase by the user. This warranty does not cover tools which are altered or used for a purpose other than that for which it was intended or used in a manner inconsistent with any instructions regarding its use. The exclusive remedy for any unit found to be defective under this warranty is limited to the repair or replacement of the defective unit without charge, and Arctic Fox® shall **NOT** be liable for any consequential or incidental damages, including labor charges.

HOTLINE® WARRANTY

Arctic Fox® warrants the purchaser that the product shall be free from defects in materials and workmanship appearing under normal use and service. The product shall be warranted for a period of one year from the date of its sale to you. Your sole and exclusive remedy for any unit found to be defective under this warranty is limited to the repair or replacement of the defective unit without charge, and Arctic Fox® shall **NOT** be liable for any consequential or incidental damages, including labor.

ENGINE OIL PAN HEAT EXCHANGER WARRANTY

Arctic Fox® Oil pan heat exchangers using coolant as a heat source are warranted against defects in material and workmanship for a period of one year from the date of purchase. This warranty does not cover components which are altered, or used for a purpose other than that for which it was intended or used in a manner inconsistent with any instructions regarding its use. The exclusive remedy for any unit found to be defective under this warranty is limited to the repair or replacement of the defective unit without charge, and Arctic Fox® shall **NOT** be liable for any consequential or incidental damages, including labor charges. Any warranty exposure to Arctic Fox® LLC will not exceed the amount of the original purchase of the component from the manufacturer.

ALTERNATIVE FUELS HEAT EXCHANGER WITH AND WITHOUT THERMOSTAT WARRANTY

Limited warranty on heat exchanger (stainless steel weldment only) of 5 years or 600,000 miles (whichever comes first) from date of purchase. Limited warranty on thermostat of 2 years, or 200,000 miles (whichever comes first) from date of purchase.

WARRANTY RETURN PROCEDURE

In order to qualify for stated warranties, a Return Goods Authorization (RGA) number must be obtained from Arctic Fox® by calling (in USA) 1-800-654-5382 or 763-972-2758. The alleged defective unit must be returned to Arctic Fox® intact, postage or freight prepaid and Arctic Fox® will return the repaired or replaced unit postage or freight prepaid. Final determination of defects shall be made by Arctic Fox® in accordance with procedures established by Arctic Fox®. No agent, employee or representative of Arctic Fox® has any authority to bind any affirmation representation or warranty concerning Arctic Fox® products except as stated herein. There are no warranties that extend beyond the description of the express non-customer product warranty as stated. The warranty is in lieu of any other warranty, express or implied, and expressly excludes any warranty of merchantability or fitness for a particular purpose. To obtain performance of this limited warranty, the alleged defective product must be returned, together with reasonable proof of purchase, postage or freight prepaid, directly to (in USA):

Warranty Department
Arctic Fox, LLC
570 South 7th Street
Delano, MN 55328

B-500E SECTION

**INTERNATIONAL PRODUCTS AND
REPLACEMENT PARTS**


AVAILABLE FROM ARCTIC FOX® EUROPE

**ARCTIC FOX® EUROPE
STRIJMADEN 5, 4703 RG ROOSENDAAL, THE NETHERLANDS
PHONE: **31 (0) 165 55 9245—FAX: **31 (0) 165 54 9640
WEBSITE: www.arctic-foxeurope.eu**

Note: Most products listed in B-500 North American section of catalog are also available from Arctic Fox® Europe

HOT FOX™ IN-LINE/IN-TANK FUEL WARMERS

- **Lowest Profile (34mm)**
- **Stainless Steel**
- **All Welded Construction**
- **Sizes for All Tanks**
- **Rotates for Easy Mounting**
- **Mounts in 40mm Opening**

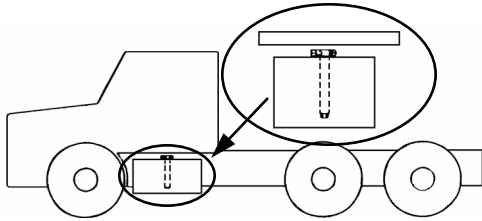



Low Profile Design

HOT FOX™ fits where other fuel warmers can't.

Get faster warming and cleaner installation with the HOT FOX™ fuel warmer from Arctic Fox. It truly is an in-line fuel warmer that installs in the fuel tank. The simple stainless steel tube inserts into the tank through a 40mm diameter opening. Coolant passages inside the tube surround the fuel standpipe to provide excellent heat rise. The internal fuel line features an exclusive spiral design to offer larger heat exchange surface from warm coolant to cold fuel.

For most efficient heat transfer, choose the longest HOT FOX™ fuel warmer available for your tank diameter/depth. The end of the warmer, or extension nipple, should be 25mm from the bottom of the tank. Each unit comes with a 51mm extension fitting: A-858. Special sizes are available upon request.

Covered by U.S. Patent No.'s
4,748,960—5,029,634, and 5,135,044

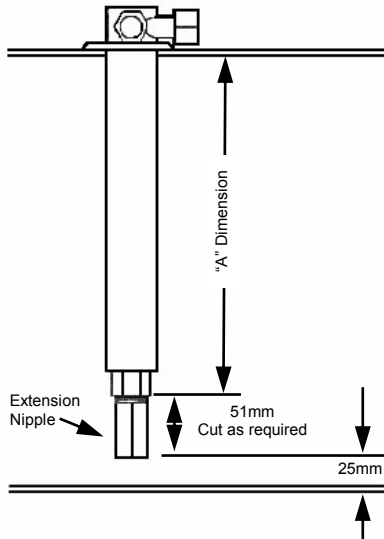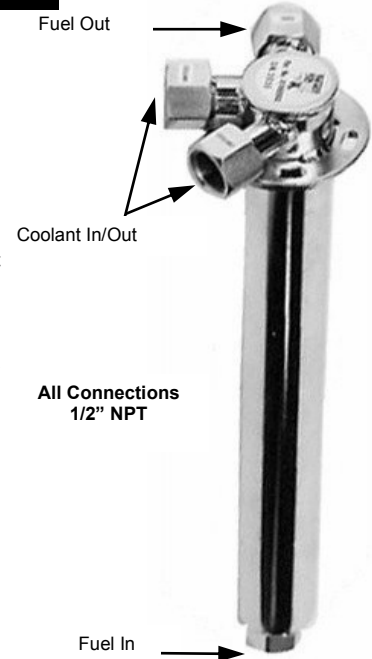

SELECTION CHART		"A" Dimension		
Tank Depth/Diameter	Part Number	No Spacer	13mm Spacer KT-875E	25mm Spacer KT-877E
203-245mm	HFG 08-10E	178mm	165mm	152mm
245-305mm	HFG 10-12E	229mm	216mm	254mm
305-356mm	HFG 12-14E	279mm	267mm	203mm
330-381mm	HFG 13-15E	305mm	292mm	279mm
356-406mm	HFG 14-16E	330mm	318mm	305mm
432-483mm	HFG 17-19E	406mm	394mm	381mm
508-559mm	HFG 20-22E	483mm	470mm	457mm
559-610mm	HFG 22-24E	533mm	521mm	508mm
610-660mm	HFG 24-26E	584mm	572mm	559mm
660-711mm	HFG 26-28E	635mm	622mm	610mm
686-737mm	HFG 27-29E	660mm	648mm	635mm

Heat Rise Data				Coolant Temperature between 89°C and 94°C—Coolant flow at 19LM							
HFG 13-15				HFG 20-22				HFG 27-29			
Fuel Flow L/M	Temp In °C	Temp Out °C	ΔT	Fuel Flow L/M	Temp In °C	Temp Out °C	ΔT	Fuel Flow L/M	Temp In °C	Temp Out °C	ΔT
0.6	-17	21	38	0.7	-20	29	49	0.8	-18	28	46
1.9	-16	6	22	1.9	-20	11	31	2.2	-18	22	40
5.8	-18	-5	13	5.5	-20	1	21	6	-17	8	25
0.6	-29	16	45	0.8	-28	20	48	1.1	-30	19	49
1.9	-29	-7	36	2.5	-29	1	30	1.9	-30	13	43
5.7	-29	-15	14	6	-29	-8	37	6.9	-29	-3	26
0.8	-37	3	40	0.6	-38	26	64	0.6	-35	20	55
1.9	-37	-13	24	1.9	-38	-7	31	2	-36	3	39
5.5	-37	-22	15	5.6	-38	-19	19	6	-36	-12	24

For installations into non-reinforced openings in tanks manufactured of 14 gauge (1.9mm) and lighter steel or 2.5mm and lighter aluminum, the appropriate adapter kit KT-826F, KT-827C, or KT-831 CS is suggested. For extreme vibration applications and all applications involving horizontal mounting, the use of either A-1721, or A-2060 adapters is suggested.


HOT FOX™ FUEL WARMER WITH AUXILIARY STANDPIPE

The Hot Fox™ fuel warmer with Auxiliary Standpipe from Arctic Fox combines heated fuel standpipes for main fuel and accessory fuel supply with an in-tank fuel warmer. The streamlined all stainless steel unit installs in the fuel tank. Operators can now easily supply diesel fired coolant heaters, diesel fired cab heaters, and other auxiliary fuel requirements as well as the main engine fuel supply all in one package.

FEATURES AND BENEFITS:

- Supplies warm fuel for both main engine and fuel fired coolant pre-heaters, cab warmers, or other air heaters.
- Available with 2mm or 4mm I.D. Auxiliary Fuel Tube to accommodate low or high fuel flow accessories.
- Stainless Steel Construction for durability and compatibility with all fuels and additives.
- Low Profile—51mm mounts on vehicles with reduced clearance between fuel tank and cab

PART NUMBER	TANK DEPTH	COOLANT PORT SIZE	MAIN FUEL PORT SIZE	AUX FUEL PORT SIZE	AUX FUEL TUBE I.D.
TWHF 10-12 2MME	254-305mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 12-14 2MME	305-356mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 13-15 2MME	254-381mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 14-16-2MME	356-406mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 17-19 2MME	432-483mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 20-22 2MME	508-559mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 22-24 2MME	559-610mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 24-26 2MME	610-660mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 26-28 2MME	660-711mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 27-29 2MME	686-737mm	1/2" NPT	1/2" NPT	1/8" NPT	2mm
TWHF 10-12 4MME	254-305MM	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 12-14 4MME	305-356mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 13-15 4MME	254-381mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 14-16 4MME	356-406mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 17-19 4MME	432-483mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 20-22 4MME	508-559mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 22-24 4MME	559-610mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 24-26 4MME	610-660mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 26-28 4MME	660-711mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm
TWHF 27-29 4MME	686-737mm	1/2" NPT	1/2" NPT	1/8" NPT	4mm

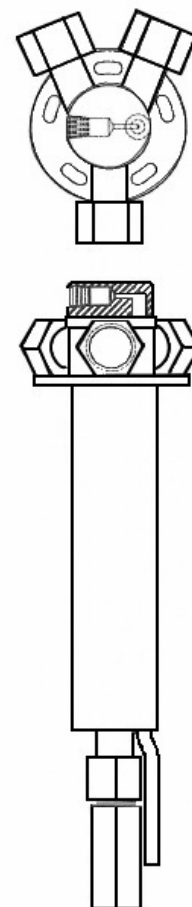

Manufactured under US Patent #'s 4,748,960-5029,634 and 5,135,044. Other USA and International Patents Pending

HOT FOX™ FUEL WARMER OPTIONAL ACCESSORIES



Application: Adds up to 533mm length to a HOT

SP-1950—EXTENSION NIPPLE



Application: Fits on the HOT FOX® to pre-filter fuel 800 mu nominal.

A-2314—SCREEN



Application: To cover hole when HOT FOX® is

A-870—BLANK PLATE



SPACER KITS

KT-875E

Application: To raise HOT FOX® (with metric fasteners) fuel warmer 13mm above tank—includes:
 (5) - A-863E Bolt, Socket Head #10-32 UNF
 (1) - A-841 Gasket
 (1) - A-875E 13mm Spacer




KT-877E

Application: To raise HOT FOX® (with metric fasteners) fuel warmer 25mm above tank—includes:
 (5) - A-869E Bolt, Socket Head #10-32 UNF
 (1) - A-841 Gasket
 (1) - A-875E 25mm Spacer



HOT FOX™ FUEL WARMER REPLACEMENT PARTS

ITEM	QTY	DESCRIPTION	PART #
1	5	#10-32 UNF x 1.0 Cap Screw	A-857E
2	5	Stainless Steel Washer	A-861
3	2	Self Drill / Tap Screw	A-608
4	1	HOT FOX™ Fuel Warmer Gasket	A-841
5	1	Back Up Plate / Template	A-834E
6	1	1/2" NPT X 51mm Extension Nipple	A-858
7		HOT FOX™ Fuel Warmer Extension Nipple—1/2" NPT X 533mm Long	SP-1950
8		HOT FOX™ Fuel Warmer Hardware Kit (Includes items 1-6)	KT-834E
9		Screen—Fuel Pre-filter	A-2314

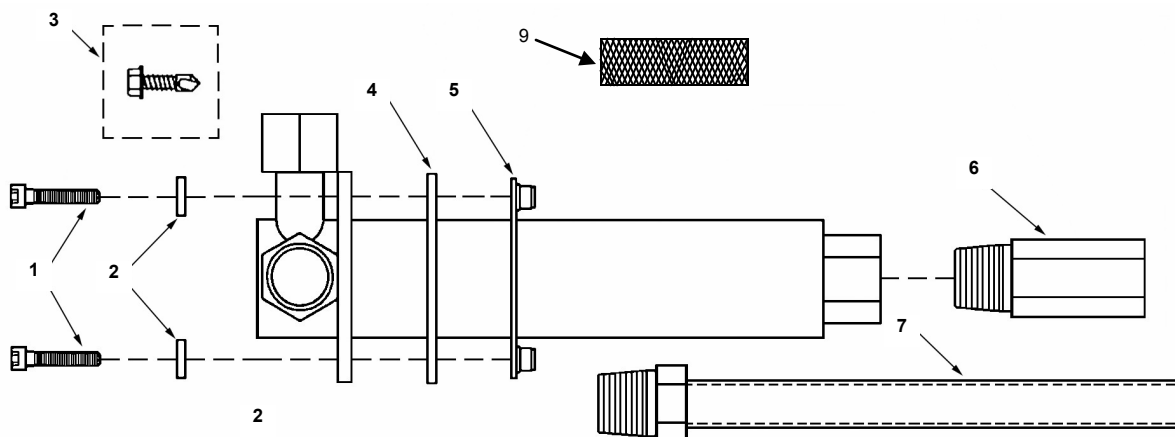

MISCELLANEOUS METRIC ADAPTER FITTINGS FOR NORTH AMERICAN NPT THREADS

See pages xx-xx in B-500 North American Catalog

PART NO.	DESCRIPTION
A-4331	Elbow, Male 90° 3/8" NPT X 10mm tube size
A-4123	Elbow, Male 90° 1/2" NPT X 12mm tube size
A-4544	Elbow, Male 90° 1/2" BSPT X 15mm tube size
A-4123-16	Elbow, Male 90° 1/2" NPT X 16mm tube size
A-4167	Hosebarb elbow 90° 1/2" NPT X 19mm
A-4353	Hosebarb straight 1/2" NPT X 19mm
A-4334	Connector, Straight Male 3/8" NPT X 10mm tube size
A-4335	Connector, Straight Male 1/2" NPT X 12mm tube size
A-4543	Adapter, Male 1/2" NPT X Female BSP

SHUT-OFF THERMOSTATS



S-400T / S-440T
With A-289
Steel Tee



S-400ST / S-440ST
With A-284
Steel Street Tee



S-400HT / S-440HT
With A-289 Steel Tee
(2) 1/4x20 Mounting Holes



S-400BT / S-440BT
With A-289 Steel Tee
Mounting Bracket, (2) Bolts & Washers


Used to control fuel temperature for any coolant type fuel warmer

- Model 400 stops coolant flow when fuel temperature through the Tee is approximately 25° to 35° C
- Model 440 stops coolant flow when fuel temperature through the Tee is approximately 40° to 52° C
- All fluid connections are 1/2" NPT


NOTE: Both models are coolant SHUT-OFF thermostats, any component or device connected in series with this product will NOT receive coolant once it is closed at the fuel temperatures shown.

DIMENSIONS

S-400BT

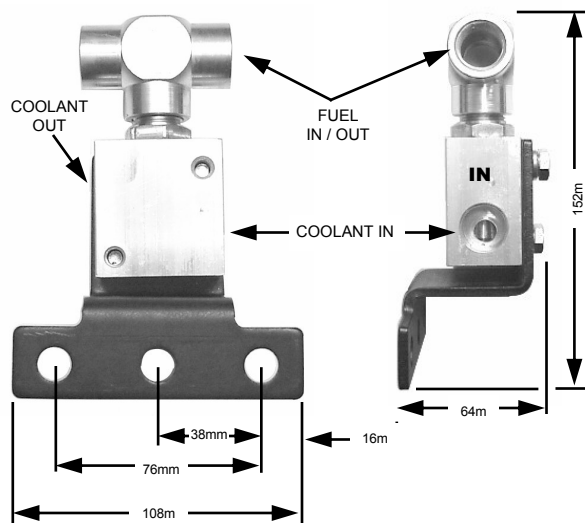


S-400BT

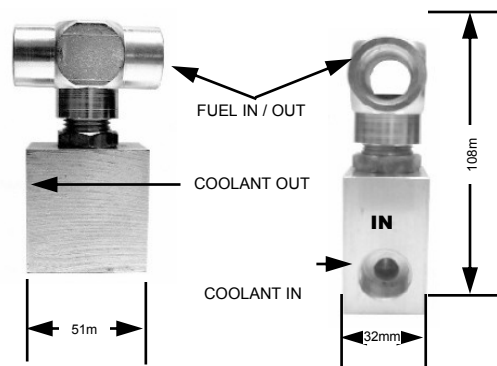


S-400BT REPLACEMENT PARTS

ITEM	QTY.	DESCRIPTION	PART #
1	1	Shut-Off Thermostat Assembly	S-400HT
2	1	1/2" NPT Pipe Tee	A-289
3	1	Mounting Bracket	A-315
4	2	5/16" Split Lock Washer	A-317
5	2	5/16" UNC x 1.25" (32mm) Bolt	A-316

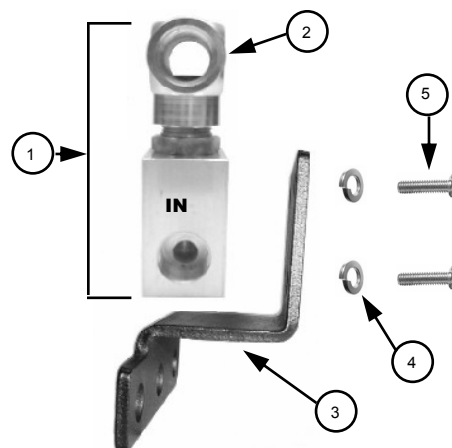

BATTERY HEATERS—BH-3100 SERIES

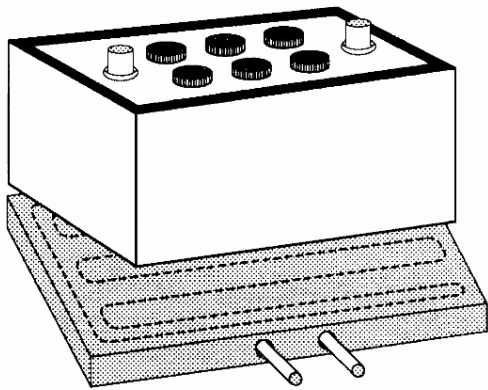


- Custom sizes quoted upon request.
- Utilizes heat energy from engine cooling system or diesel fired coolant heater.
- Increases available cold cranking amps.
- Reduces required battery charge time.
- Extends battery life.
- Durable stainless steel coolant tubes.
- Light weight aluminum heating plate.
- 1/2" NPT coolant connections.
- Simplified installation for most applications.
- Part number A-3631 Spacer available.

NOTE


IN SCHEMATIC BELOW, BATTERY WARMING IS DISCONTINUED WHEN CAB HEATER TEMPERATURE SWITCH

Typical battery heater coolant schematic for applications which utilize positive cab heater coolant flow shut-off valves as a means of temperature control.

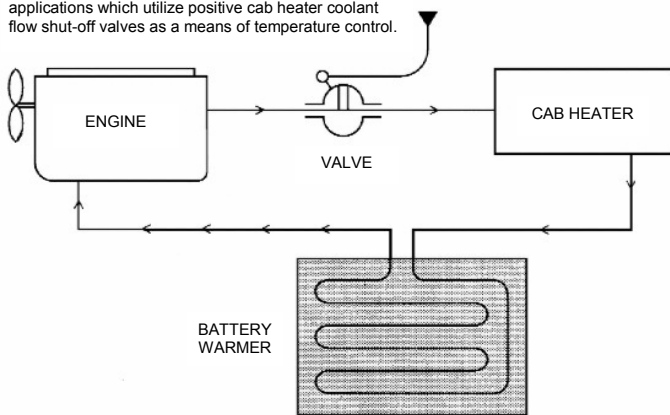


NOTE:


All models require minimum 25.4mm clearance above the batteries.






Model BH-3107
470m X 656mm
DAF (Some Models)



Model BH-3117
480m X 480mm
Scania (Some Models)



Model BH-3121
400m X 560mm

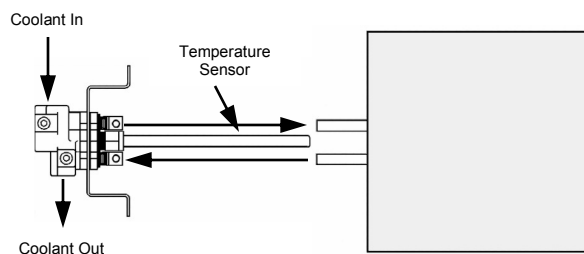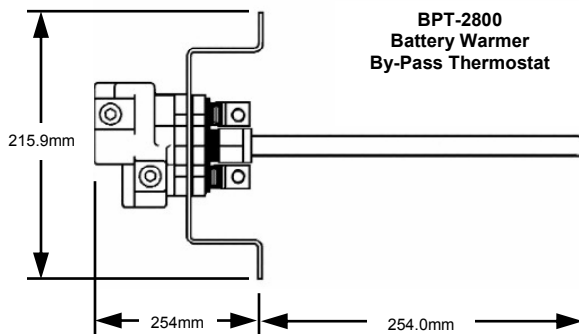

Schematic for Battery Warmer with Optional By-Pass Thermostat

WARRANTY AND RETURNS—INTERNATIONAL SALES ONLY

FUEL AND FLUID WARMER WARRANTY(COOLANT)

All Arctic Fox® warmers (other than engine oil pan heat exchangers and alternative fuel heat exchangers) using coolant are warranted against defects in materials and workmanship for a period of 5-years or 1,000,000 kilometers from the date of purchase by the user. This warranty does not cover warmers which are altered or used for a purpose other than that for which it was intended or used in a manner inconsistent with any instructions regarding its use. The exclusive remedy for any unit found to be defective under this warranty is limited to the repair or replacement of the defective unit without charge, and Arctic Fox® shall **NOT** be liable for any consequential or incidental damages, including labor.

ELECTRICAL COMPONENTS WARRANTY

HOTLINE®, ELECTRIC RESERVOIR WARMERS AND CAL RODS

All Arctic Fox® Electrical components are warranted for one year from date of sale to the original consumer against defects in workmanship and materials. The manufacturer's only obligation shall be to repair or replace at the manufacturer's option the product provided it is returned transportation prepaid to the factory within one year from date of sale to original consumer. Defects or failures due to incorrect installation, improper voltage, improper usage or handling, or by any other conditions beyond our control, as to any and all of which the manufacturer will be sole judge, are specifically excluded from this warranty. This warranty gives you specific legal rights. You may also have implied warranty rights which vary from state to state, or province to province, depending upon the location of your residence. No other liability of any kind, arising from the use of the product, whether defective or not, is assumed.

NON-HEATED STANDPIPE WARRANTY

All Arctic Fox® non-heated standpipes are warranted against defects in workmanship for a period of 5 years or 1,000,000 kilometers from the date of purchase by user. Tank flange mounting gaskets and installation accessories are warranted against defects for a period of 90 days. This warranty does not cover standpipes which are altered, installed or used in a manner inconsistent with any Arctic Fox® instructions regarding use or installation. The exclusive remedy for any unit found to be defective under this warranty is limited to the repair or replacement of the defective unit without charge, and Arctic Fox® shall **NOT** be liable for any consequential or incidental damages, including labor charges.

COOLANT DAM® PRESSURE TESTER WARRANTY

The Arctic Fox® COOLANT DAM® PRESSURE TESTER is warranted against defects in materials and workmanship for a period of one year from date of purchase by the user. This warranty does not cover tools which are altered or used for a purpose other than that for which it was intended or used in a manner inconsistent with any instructions regarding its use. The exclusive remedy found to be defective under this warranty is limited to the repair or replacement of the defective unit without charge, and Arctic Fox® shall **NOT** be liable for any consequential or incidental damages, including labor charges.

ENGINE OIL PAN HEAT EXCHANGER WARRANTY

Arctic Fox® Oil pan heat exchangers using coolant as a heat source are warranted against defects in material and workmanship for a period of one year from the date of purchase. This warranty does not cover components which are altered, or used for a purpose other than that for which it was intended or used in a manner inconsistent with any instructions regarding its use. The exclusive remedy for any unit found to be defective under this warranty is limited to the repair or replacement of the defective unit without charge, and Arctic Fox® shall **NOT** be liable for any consequential or incidental damages, including labor charges. Any warranty exposure to Arctic Fox®, LLC will not exceed the amount of the original purchase of the component from the manufacturer.

WARRANTY RETURN PROCEDURE

In order to qualify for stated warranties, a Return Goods Authorization (RGA) number must be obtained from Arctic Fox® by calling (in Europe) **31 (0) 165 559245 or (in USA) 1-800-654-5382 or 763-972-2758. The alleged defective unit must be returned to Arctic Fox® intact, postage or freight prepaid and Arctic Fox® will return the repaired or replaced unit postage or freight prepaid. Final determination of defects shall be made by Arctic Fox® in accordance with procedures established by Arctic Fox®. No agent, employee or representative of Arctic Fox® has any authority to bind any affirmation representation or warranty concerning Arctic Fox® products except as stated herein. There are no warranties that extend beyond the description of the express non-customer product warranty as stated. The warranty is in lieu of any other warranty, express or implied, and expressly excludes any warranty of merchantability or fitness for a particular purpose. To obtain performance of this limited warranty, the alleged defective product must be returned, together with reasonable proof of purchase, postage or freight prepaid, directly to:

(In USA) Warranty Department
Arctic Fox, LLC
570 South 7th Street
Delano, MN 55328

(In Europe) Warranty Department
Arctic Fox Europe
Strijmaden 5
4703 RG Roosendaal
The Netherlands

MANUFACTURERS RIGHTS RETAINED

Arctic Fox® reserves the right to make changes in design or to make additions to or improvements upon any of its products at any time without incurring any obligation whatsoever to install the same or improve upon products previously manufactured.

Arctic Fox, LLC is a leading supplier of high quality components to the heavy-duty trucking and off-highway equipment markets. Incorporated in 1979, Arctic Fox has grown to become one of the leading fuel and fluid warming manufacturers in North America. Our products and fuel system components are currently being installed on production vehicles by some of North America's largest truck producers, including Freightliner, Sterling Trucks, Kenworth, Peterbilt, Navistar, Volvo Heavy Truck Corp., and Western Star. Our company also is a Fluid Heating System integrator for many off-highway OEM's, oil & gas, and military customers. We are continuing to forge new partnerships with other manufacturers to provide customers with a "single source" supplier for vehicle fluid heating systems.

As a global supplier, we opened a sales office and distribution warehouse in Roosendaal, The Netherlands in 1996. Arctic Fox has expanded to provide fluid heating products in Western Europe and in many of the world's harshest and coldest climates. We were the first U.S. manufacturer of fuel heating products to design and build products exclusively for Russian produced trucks. As markets expand and the global marketplace opens, Arctic Fox is positioned to extend our North American leadership and technical expertise to the rest of the world.

Since many of our OEM customers are consolidating suppliers, Arctic Fox extends our manufacturing capabilities to existing and new industries. Current capabilities include tube bending, tube end forming, tube fabrication, manual & robotic welding and brazing. We have the ability to take a project from start to finish with complete packaging and assembly capabilities. As a manufacturer, we now service a wide spectrum of customers from the medical industry, steel furniture, industrial floor sweeping and recreational vehicles. Located in the upper Midwest, our central U.S. location and The Netherlands warehouse, allows us to effectively service both coasts and points around the world.

ISO 9001 registration was achieved in early 1997. Arctic Fox was one of the first U.S. manufacturers of high quality fuel heaters and fabricated tube assemblies to achieve this coveted quality rating. Arctic Fox has made the commitment to be a supplier that consistently delivers quality products on time and at a fair price. We pride ourselves on meeting the high standards set by our customers.

In March, 2007, Spell Capital Partners acquired a controlling interest in Arctic Fox with a mission to expand Arctic Fox, by working with members of the existing management team, who offer vast experience and keen insight about the fuel and fluid heating business and contract tube fabrication industry.

Arctic Fox's corporate philosophy is to "treat customers, employees and suppliers how we would want to be treated," fairly, with respect and with an emphasis on superior customer service.

Thank you for the privilege to be of service to you.

The Arctic Fox LLC Team



P.O. box 309
Delano, Minnesota 55328 USA
Tel: (800) 654-5382
(763) 972-2758
Fax: (763) 972-2873
email: info@arctic-fox.com
Web: www.arctic-fox.com

Our centralized location near Minneapolis, MN USA means we ship north, south, east, or west for fast delivery.

Quality Service Since 1979

For Fast, Accurate, Courteous Service
Call Toll Free:

1-800-654-5382





P.O. Box 309—570 south 7th Street—Delano, MN 55328—USA
(800) 654-5382 Or (763) 972-2758—FAX (763) 972-2873
www.arctic-fox.com